

TM2 / TM2C

True Wireless Stereo Earphones

User's Manual



Thank you for purchasing TM2 / TM2C.

この度は TM2 / TM2C をお買い上げいただきありがとうございます。

Please be sure to read this manual before using the product.

ご使用になる前に必ずお読みください。

Contents

page 02 FAQ [frequently Asked Questions] -English-

page 03 FAQ [よくあるご質問] - 日本語 -

page 04 - 09 User's Manual -English-

page 10 - 16 取扱説明書 - 日本語 -

page 17 - 24 TM Sound Support Main Menu -English-

page 25 - 32 TM Sound Support Main Menu - 日本語 -

page 33 - 34 Safety Information

page 35 - 36 安全上のご注意

After opening the package, please first charge the battery before use.

開封後は必ず充電 を行ってからご使用ください。

Status & Condition	Solution
<p>Power does not automatically turn ON when removed the units from cradle.</p>	<p>▶ Disconnect the USB cable from the cradle. For automatically turning ON the power with the USB cable connected, push the back of main units with your finger. Doing so, the main units will be lifted up. Then first release the charging contact part and remove the units out of cradle.</p>
<p>Even if you return the main units to the cradle, the screen of the Bluetooth device displays "Connecting" or the music continues to sound.</p>	<p>▶ Reset the main units. As in the same way as the charging method, it is forcibly reset by plugging the USB cable into the cradle and energizing (the LED of the main unit lights up in red).</p>
<p>Even if the multi button is pressed, it cannot perform the power ON/OFF or other functions, or the operation has become unstable.</p>	<p>When using it again, disconnect the USB cable from the cradle, remove the main units, check that the power is turned ON automatically, and start pairing again from the beginning.</p>
<p>Having ignored the selection window of "pairing" or you have canceled at the time of pairing.</p>	<p>▶ The roll swapping function is disabled. Although audio will be output from the left and right, the roll swapping function will not be enabled. To enable it, the cancel should not be pressed but select "Pair Set" or "Pairing". If you have pressed the Cancel, delete the history of the product (Fostex TM2 Left or Right) from the connected Bluetooth device, and start pairing from the beginning.</p>
<p>At the time of pairing, the process cannot be done by selecting the unit displayed with "BLE" at the end, such as Fostex TM 2 Left BLE or Fostex TM 2 Right BLE on the connection screen of the Bluetooth device.</p>	<p>▶ Try starting the pairing again from the beginning. Turn off the Bluetooth function of the connected Bluetooth device, and start again the pairing process from the beginning. BLE is an extended specification for sharing information such as the battery level.</p>
<p>The LED of the main unit continues to flash rapidly in blue, and it does not stop flashing even after a forced reset is applied.</p>	<p>▶ This is in the setting mode to return to the factory default condition. After you press and hold the multi-button for 15 seconds and then release the finger, the mode will be reset to the factory default, and the LED will start blinking rapidly in blue. Please process according to the instruction manual.</p>
<p>Only one unit is displayed as "Connected" and the other as "Not Connected" or displayed nothing.</p>	<p>▶ It is normal to display as "Not Connected" etc. for the slave unit. However, depending on the Bluetooth device, the slave unit may not be displayed, so please play music and make sure that it is connected.</p>
<p>White noise can now be heard after replacing with other manufacturers earphones.</p>	<p>▶ It may sound louder depending on the performance of the earphones. Depending on the earphone you use, you may hear louder according to the A2DP profile signal that transmits audio via Bluetooth. It may be reduced if you try after restarting the connected Bluetooth device.</p>
<p>No sound from one unit.</p>	<p>▶ Turn ON the power. Or please charge the battery. Since the power may be OFF, hold the multi button for 3 seconds and release the finger to turn ON the power. If it does not turn ON, the battery may have run out, charge it.</p>
<p>Poor response from touch sensor (volume control).</p>	<p>▶ Please operate slowly. Operate the sensor area slowly and friction slightly stronger, like the action of buttering the bread. Also, charge the battery enough and try again.</p>

状況・状態	解決方法
クレイドルから外しても自動的に電源が入らない。	<p>▶クレイドルからUSBケーブルを抜いてください。</p> <p>USBケーブルを差した状態で自動的に電源オンにしたい場合は、本体の後部を指で押すと、本体が浮き上がりますので、充電接点部分を先に離れた状態で取り外してください。</p>
クレイドルに戻しても接続するBluetooth®機器の画面に「接続中」と表記される、または音楽が鳴り続けている。	<p>▶本体をリセットしてください。</p> <p>充電方法と同じく、クレイドルにUSBケーブルを差して通電させる(本体のLEDが赤色に点灯)ことで強制的にリセットされます。再度ご使用の際は、クレイドルからUSBケーブルを抜き、本体を取り出して自動的に電源オンとなることを確認し、ペアリングをはじめからやり直してください。</p>
マルチボタンを押しても電源オン・オフ、その他操作ができない、または動作が不安定になった。	<p>▶ロールスワッピング機能が無効になります。</p> <p>左右から音声は出ますが、ロールスワッピング機能が有効になりませんので、有効にするためには、キャンセルを押さずに「ペア設定する」または「ペアリングする」を選択してください。キャンセルを押してしまった場合は、接続するBluetooth®機器から本製品(Fostex TM2 LeftまたはRight)の履歴を削除し、ペアリングをはじめからやり直してください。</p>
ペアリング時に「ペアリングする」または「ペア設定する」の選択ウィンドウを無視、またはキャンセルした。	<p>▶ペアリングをはじめからやり直してください。</p> <p>接続するBluetooth®機器のBluetooth®機能をオフにし、ペアリングをはじめからやり直してください。BLEはバッテリー残量等の情報を共有するための拡張仕様です。</p>
ペアリング時、接続するBluetooth®機器の接続画面にFostex TM2 Left BLE、またはFostex TM2 Right BLEのように、末尾に「BLE」と表記されている方を選択しペアリングできない。	<p>▶工場出荷状態に戻す設定モードになっています。</p> <p>マルチボタンを押し続け15秒で指を離すと、工場出荷状態に戻すモードになり、LEDが青色で高速点滅を開始しますので、取扱説明書を参考に処理を行ってください。</p>
本体のLEDが青色で高速点滅し続け、強制リセットをかけても点滅がおさまらない。	<p>▶スレーブ機には「未接続」等と表記されます。</p> <p>但し、接続するBluetooth®機器によっては、スレーブ機が表記されない場合がありますので、音楽を再生し接続されていることを確認してください。</p>
片側だけ「接続中」と表記され、もう片方は「未接続」と表示される。または表示されない。	<p>▶イヤホンの性能により大きく聴こえる場合があります。</p> <p>ご使用になるイヤホンによっては、Bluetooth®で音声を伝送するA2DPプロファイル信号に合わせて大きく聴こえる場合があります。また、接続するBluetooth®機器を再起動してからお試しくださいと軽減する場合があります。</p>
他社製イヤホンに付け替えたならホワイトノイズが聴こえるようになった。	<p>▶電源をオンにしてください。または充電してください。</p> <p>電源がオフになっている可能性がありますので、マルチボタンを3秒間長押しして指を離し、電源をオンにしてください。オンにならない場合は、バッテリーが切れている可能性がありますので、充電をしてください。</p>
片側から音が出なくなった。	<p>▶ゆっくり操作をしてください。</p> <p>パンにバターを塗る動作のように、センサーエリアを、少々強めにこするようによくと操作してください。また、十分に充電してから再度お試しください。</p>
タッチセンサー(ボリューム操作)の反応が悪い	<p>▶ゆっくり操作をしてください。</p> <p>パンにバターを塗る動作のように、センサーエリアを、少々強めにこするようによくと操作してください。また、十分に充電してから再度お試しください。</p>

FOSTEX

TM2C

True Wireless Stereo Earphones


User's Manual





Qualcomm aptX and Qualcomm TrueWireless are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries.

Package Contents

- ① Main unit x 2 (L&R pair: detachable type MMCX earphones, flexible short cables pre-installed)
- ② Battery charging case x 1
- ③ USB cable for battery charge (300mm x 1)
- ④ Earphone tips (S,M,L) 1pair each
- ⑤ PU leather pouch
- ⑥ Logo sticker x 1
- ⑦ Safety Information x 1

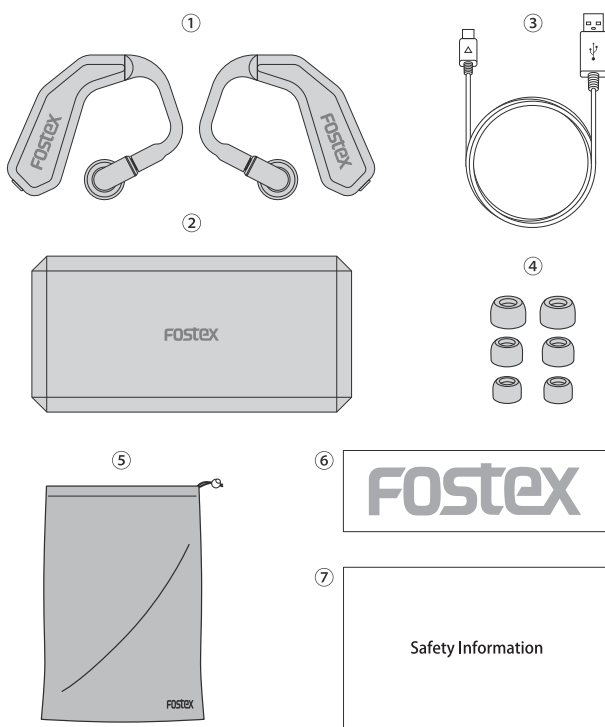


Names and Functions

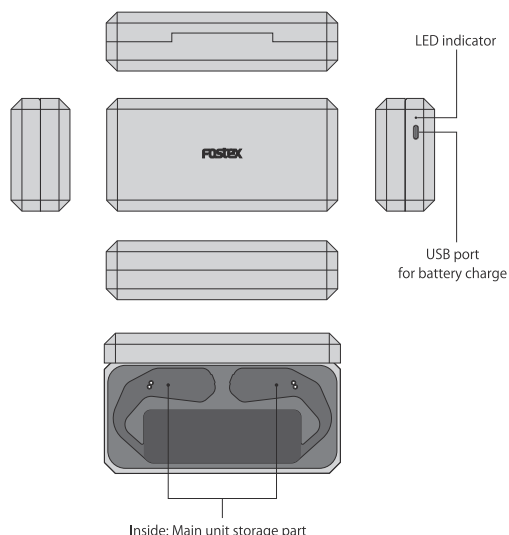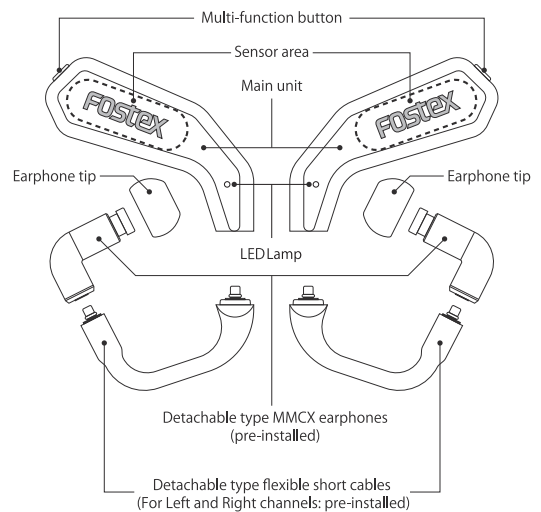


⚠ Caution on attaching and detaching


Since there is an L and R marking on the back of the individual main unit and flexible short cable (inside the connector when attached), be careful not to make a wrong connection.

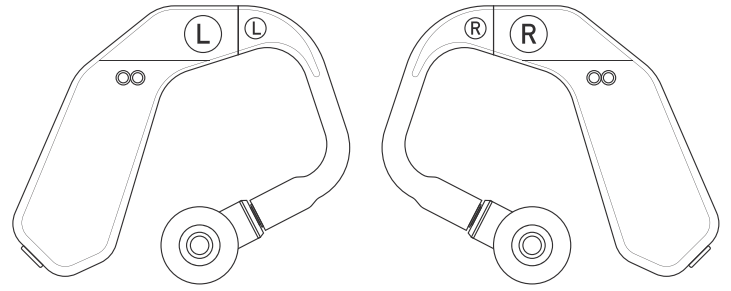


■ How to wear TM2C

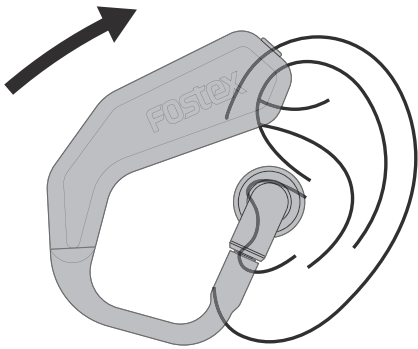

- ① Insert the earphone tip into your ear canal while hanging the main body on the ear.

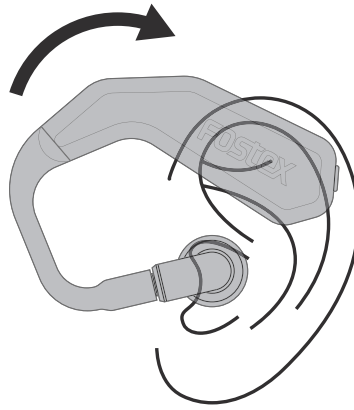


- ② Using the inserted earphone as the axis, rotate the main body backward so as to tuck it in the upper part of ear.

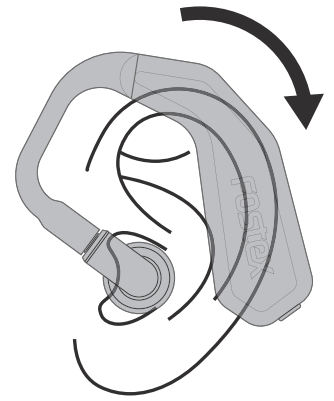

- ③ Rotate it further until the cable hits the ear, adjust the cable form and fix to the shape around the ear.


■ How to operate TM2C

multi-function button

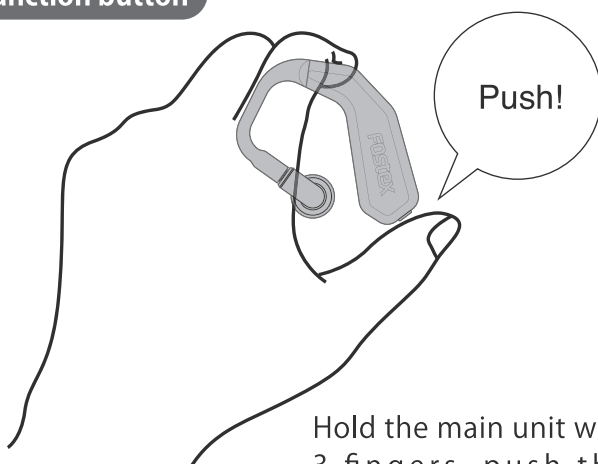

Hold the main unit with 3 fingers, push the button with your thumb.

Touch sensor

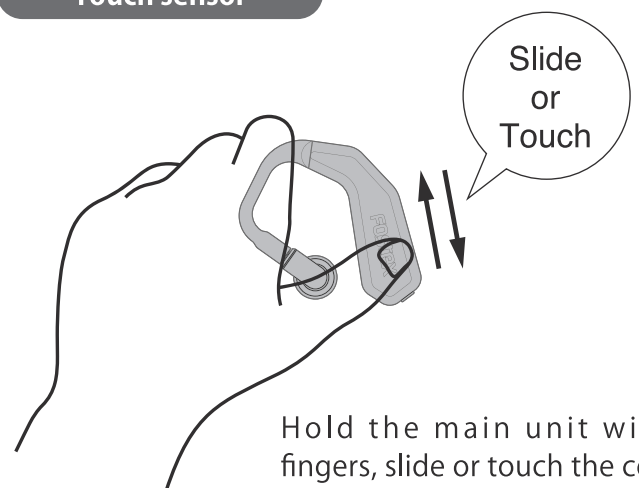

Hold the main unit with 3 fingers, slide or touch the center of Fostex logo with your thumb.


■How to charge battery

This product is charged using the charging case included. Please charge before start using.

1. Connect the USB type C of the included charging cable to the charging case. Connect the other side to a commercially available USB AC adapter, not included, and plug it into an AC outlet.

* Do not use other cables than the included USB cable.

* Use a USB AC power adaptor with below 5V1 A.

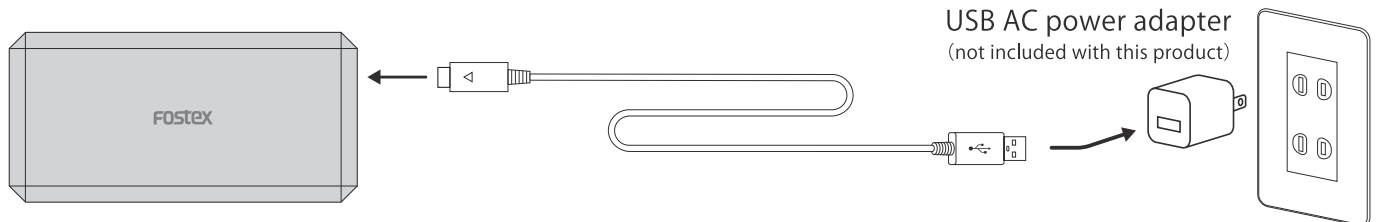


When battery charge starts, the LED indicator of charging case will blink slowly.

* Refer to "Function and operation method, guidance and LED indication"

* Time to full charge: approx. 1 h 30min.

2. Open the lid of battery charge cradle and place the TM2C main units.

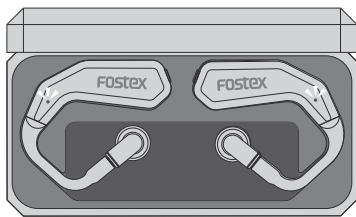

* After approx.1 h 30min, battery charge will complete and LED indicator will be off.

* When the charging case is fully charged, it can charge the TM2C Main units about 3 times.


【Caution】

- In case battery charge will not complete even after 1h 30min, stop charging.
- Even if you do not use for a long time, please charge once every 6 months. It may totally self-discharge otherwise and become impossible to charge further.
- The TM2C built-in lithium ion battery is a consumable item. The available use time becomes shorter with the use period. However, if the use time becomes extremely short, it is the life of the battery.
- No function available when charging the battery.

Status		LED
No Power given	Charge the main body	Red Breathing light
	The main body is fully charged	Lights Green
Power given (5V input)	Charge the main body and case	Red Breathing light
	The main body and case are fully charged	Lights Green
Check the charging capacity of the charging case	1. Plug in the USB cable 2. Set the main body in the case	*Red light flash 100mS per second for 5 sec when battery is lower than 30% *Orange light flash 100mS per second for 5 sec when battery is between 30% to 50% *Green light flash 100mS per second for 5 sec when battery is between 50% to 100%

■ How to pair

Legacy Mode Connection

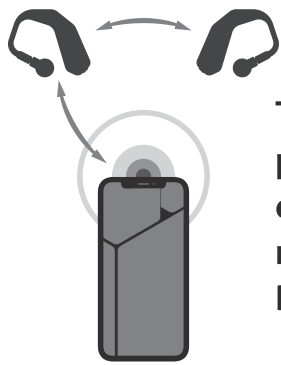

This is a conventional pairing method that connects either the left or right as a master to the Bluetooth device.

True wireless Stereo Plus Mode Connection



This is a new pairing method to connect the left and right individually to the Bluetooth device.

- ◎The determination of both modes is performed automatically at the time of connection. Thus, please refer to the instruction manual of the connected Bluetooth device to check if it is compatible with True wireless Stereo Plus mode (hereinafter TWS Plus mode).
- ◎At each time reconnecting, the legacy mode offers a roll swapping function that will automatically choose either the left or right whichever has the higher battery level as the master. Using the left and right batteries efficiently, it will offer longer operating time.

1. Enable the Bluetooth function of the Bluetooth device (smartphone, DAP etc.) to be connected. (Please refer to the instruction manual of the connected Bluetooth device.)
2. Power is turned ON automatically when taking out the left and right main Units from the cradle.

*In case of manual operation, hold down the multi-button for 3 seconds and then release the finger.

Note : The initial unpacked status (factory default) is set to start Pairing mode (blue and red LEDs flashing alternately) when taking the LEFT unit off the cradle.

3. Select either left or right, and hold down the multi-button for about 5 seconds. The LED indicator blinks alternately in blue and red, and enter the pairing mode.
4. Select "Fostex TM2 Left" or "Fostex TM2 Right" displayed in the device list on the Bluetooth device to be connected.
5. When pairing is complete, the Bluetooth device will display "Connected".
6. At the same time, connection processing with the other main unit is performed and "Bluetooth pairing request" is displayed on the Bluetooth device. Select "Pairing" or "Pair Set". The link between the left and right is performed, and pairing work will be completed.

【POINT】

- In TWS Plus mode, instead of the automatic link processed between left and right as described in the above 6, each of the left and right will directly perform pairing processing with the connected Bluetooth device, and the pairing work will be completed.
- After the power is turned OFF and then use it again, when it is removed from the cradle and turned ON, it is set to be automatically connected to the last used Bluetooth device.

function and operation method, guidance and LED indication

① Basic operations

Function/Status	Operation (same specifications on left and right)	Voice guidance	LED display
Powering ON (1)	Remove main unit from charging cradle	「Power ON」	Blinking 3 times in blue
Powering ON (2)	Press and hold the button for 3sec (When not placed to charging cradle)	「Power ON」	Blinking 3 times in blue
Powering OFF (1)	Place the main unit in the cradle	「Power OFF」	Blinking 3 times in red
Powering OFF (2)	Press and hold the button for 3sec (When not placed to charging cradle)	「Power OFF」	Blinking 3 times in red
Pairing: Pairing Start	Press and hold the button for 5sec	「Pairing」	Blinking fast in red and blue alternately
Pairing Successful	—	「Pairing Successful」	Blinking 3 times in blue
Pairing Failed	—	3min passed [Pairing Failed - Power Off]	Blinking 3 times in red
Battery remaining alert: Low Battery	—	[Low Battery] (Start warning when remaining time is 10 minutes)	(According to guidance) Blinking 4 times in red
Volume up	Touch the sensor area and slide up	“Short beep”	—
Volume down	Touch the sensor area and slide down	“Short beep”	—

② Music playback

Play or Stop	Push the button once	“Short beep”	—
Skipping to the next song	Push the button twice (during playback)	“Short beep”	—
Cueing (song being played): Cue	Push the button 3 times fast (3 seconds or more after starting music)	“Short beep”	—
Skipping to the previous song	Push the button 3 times fast (3 seconds or after starting music)	“Short beep”	—
Fast Forward (Frame Advance)	While playing music, touch the sensor area for more than 2 seconds.	“Short beep”	—
Stopping Fast Forward (Frame Advance) and return to Playback mode.	Remove your finger from the sensor area or press the multi-function button once.	“Short beep”	—

③ Call operation

Incoming call (call start)	Push the button once	“Short beep”	—
Disconnecting call	Push the button once	“Short beep”	—

■ Initial setting (return to factory default) method

Check it in the video



1. First, unplug the USB cable from the cradle.
2. Next, take out the left or right main Unit, hold down the multi-button for 15 seconds and then release the finger. The LED indicator will blink in blue rapidly.
3. Then, hold the multi-button of the other main Unit for 15 seconds and then release the finger. The LED indicator will blink in blue as well.
4. Under this condition (left and right LED rapidly blinking in blue), bring the left and right main Units close by about 2 cm. Both LED indicators will turn off once, and after about 2 seconds, only the left main Unit LED will flash in red and blue alternately.
5. In this state (Right: off, Left: red and blue fast flashing), place both main Units back to the cradle with no USB cable connected. Both LED indicators will be off and all information will reset to the initial state (factory default).
6. After that, when both Units are removed from the cradle, only the left body LED indicator blinks alternately in blue and red and it will automatically enter the pairing mode.



Be careful not to hold the button for more than 15 seconds during pairing operation.

■ Specifications

▼ Bluetooth

- Firmware version: Bluetooth ver. 5.0
- Output class: Class 2
- Communication method: FHSS
- Communication distance: approx.10m
- Frequency band: 2.4 GHz (2402 – 2480MHz)
- Corresponding profile: A2DP1.3, AVRCP1.6, HSP 1.2, HFP 1.7
- Supported codec: AAC, apt-X, SBC
- Supported content protection: SCMS-T
- Transmission frequency range: 20Hz – 20kHz

▼ Audio specifications

(Earphone stand-alone specification)

- Format: Dynamic
- Driver unit: \varnothing 6mm
- Playback frequency range: 10Hz–40kHz
- Impedance: 16 ohm
- Dimensions: W21.6 x D14.6 x H6.5mm

▼ Microphone specifications

- Format: MEMS
- Directivity pattern: omnidirectional / CVC noise canceling mounted

▼ Remote Controller specifications

- Music playback: play, pause, song feed, tune backward, cue, crawl, fast forward, volume adjustment
- Call operation: reception, call cut

▼ Other specifications

- Main unit Dimensions: W40.2 x D48.2 x H8.8mm
- Mass: 11g × 2 (Incl.Cable & Earphone)
- Main unit power supply: DC 3.7 V Built-in rechargeable lithium-ion battery
- Charging time: approx. 1h 30min (full charge)
- Continuous playback / talk time: Up to approx. 10h
- Waterproof protection grade: IPX 5

▼ Battery charge cradle specifications

- Input port: USB (type-C)
- Dimensions: W138 x D67 x H35
- Mass: 138g (except TM2 main unit)

▼ Accessories

- USB cable, earpieces (S,M,L: M size installed), PU leather pouch, sticker, instruction manual

FOSTEX

TM2C

True Wireless Stereo Earphones

完全ワイヤレス・ステレオイヤホン

取扱説明書



■はじめに


このたびはフォステクス「TM2シリーズ」をお買い上げ頂き誠に有難うございます。ご使用の前にこの取扱説明書をよくお読みの上、正しくご使用ください。尚、本書は保証書も兼ねていますので、大切に保管して下さい。

※Bluetooth®およびロゴは、Bluetooth SIG, Inc.の登録商標であり、ライセンスに基づき使用しています。

※Qualcomm aptX audio およびロゴは、Qualcom Technologies International, Ltd. の登録商標です。


パッケージの内容

- ①本体×2 (L & R ペア:着脱式MMCXイヤホン、フレキシブル・ショートケーブル装着済み)
 ②充電ケース×1 ③充電用USBケーブル(300mm×1) ④イヤークリップ(S, M, L) 各1ペア
 ※Mサイズ装着済み ⑤PUレザーポーチ ⑥ロゴステッカー×1 ⑦安全上のご注意兼保証書×1

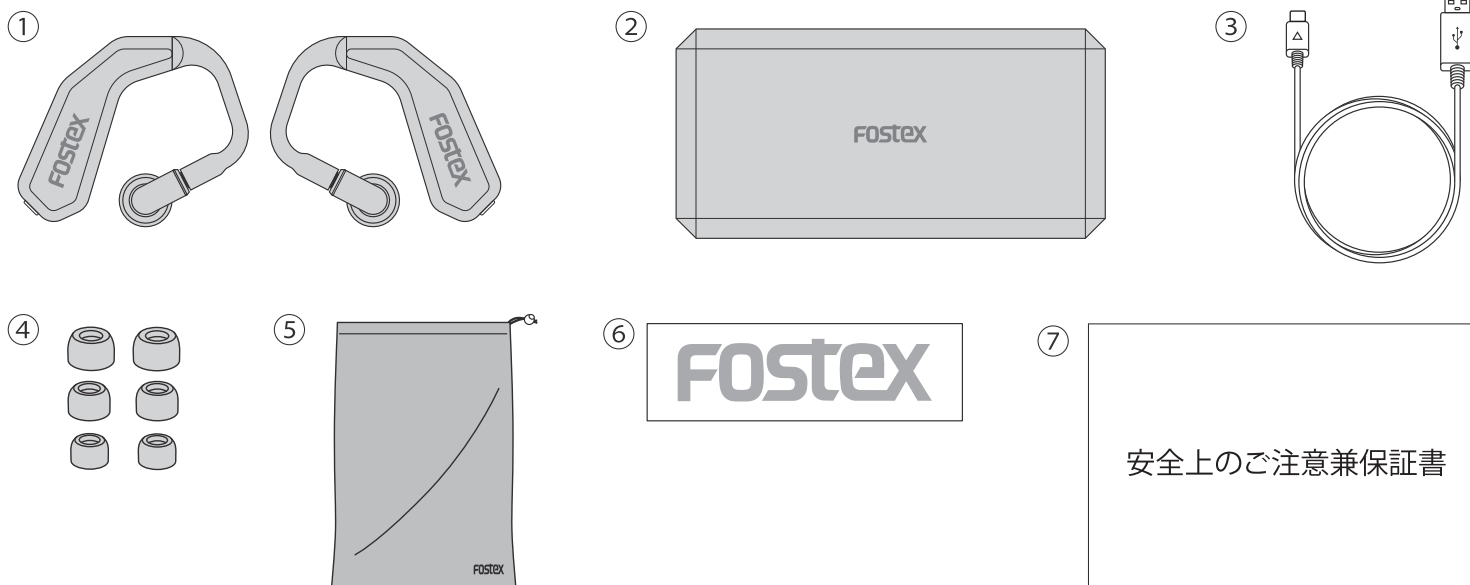


各部の名称


〔本体〕

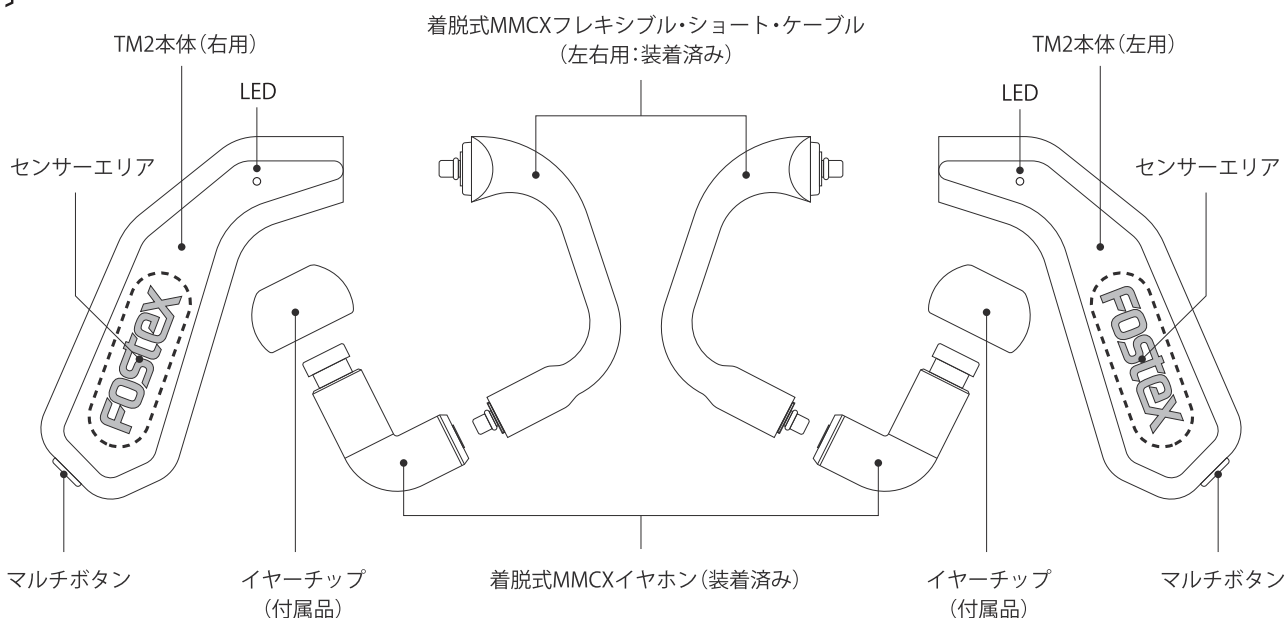

本体、およびフレキシブル・ショート・ケーブルの裏面
 (装着時の内側)に、L-R 表記がありますので、接続間
 違いのなおよびご注意ください。

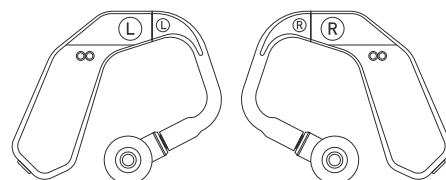

〔充電ケース〕

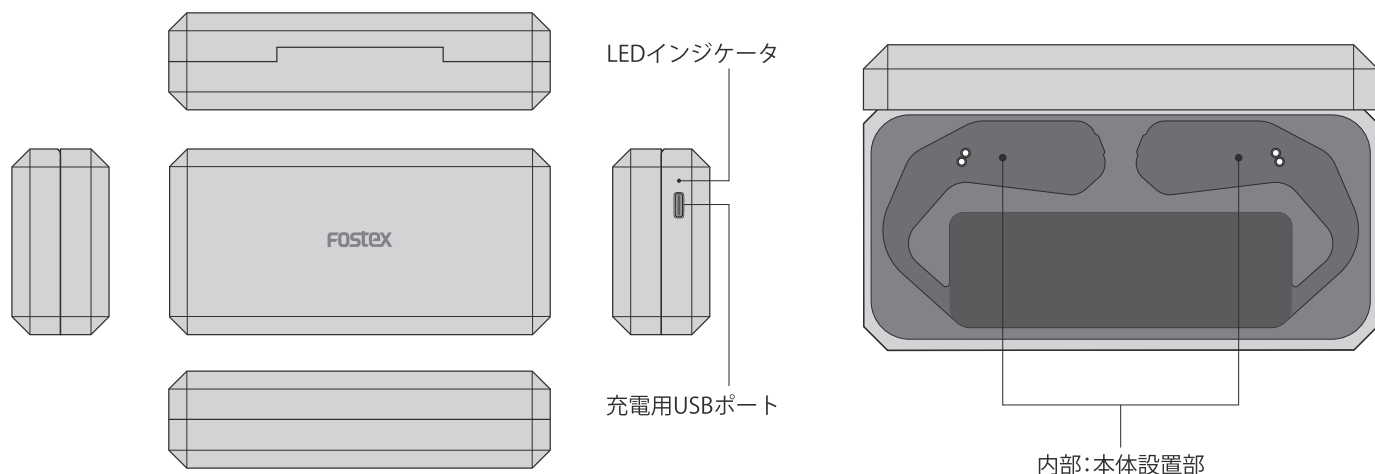


充電方法

本製品は、付属の充電ケースを使用して充電します。購入後は充電してからご使用ください。

1. 充電ケースを付属の充電用USBケーブルのUSBタイプC側を充電ケースに接続し、もう一方を市販のUSB対応ACアダプターに接続し、コンセントに差し込みます。

※付属の充電専用USBケーブル以外は使用しないでください。

※USB対応ACアダプターは、5V1A以下の市販品をお使いください。

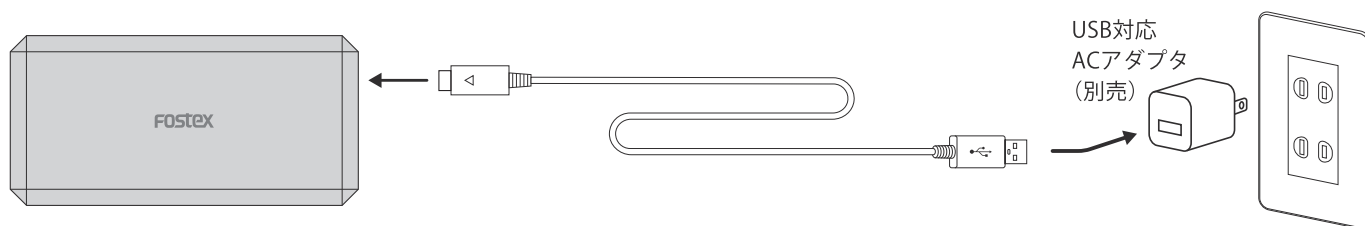


充電ケースの側面のLEDランプが赤色でゆっくり点滅し充電を開始します。

※LEDの状態についての説明は次ページの「充電ケースのLED表示について」をご覧ください。

※充電ケースは、約1時間30分で満充電されます。

2. TM2C本体を充電ケースにセットします。

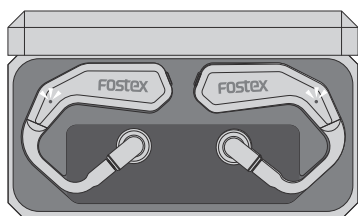

※TM2C本体の約1時間30分で充電が完了し、LEDランプは赤から青に変更したあと自動的に消灯します。

※充電ケースが満充電の場合、約2回分の充電が可能となります。




注意

- 1時間30分を超えても充電が終わらない場合は、充電を止めてください。
- 受信機本体を置いても充電が開始されない場合、充電ケースは仮の空状態となっていますので、USBケーブルを差ししてもランプが点灯しない場合があります。その際は5秒~10秒程経過を待ってUSBケーブルを抜き、再度ケーブルを差しして充電装置の起動を促すことで充電が開始されます。
- 長時間使用しない場合でも、6か月に1度は充電してください。自己放電により完全放電し、充電できない可能性があります。
- 本体内蔵リチウムイオン電池は消耗品です。使用期間と共に使用時間は短くなります。但し、極端に使用時間が短くなった場合は、電池の寿命です。
- 充電中は操作することはできません。


充電ケースのLED表示について

ステイタス		LED点灯状態
USBケーブル未接続	本体に充電	赤色ゆっくり点滅
	本体が満充電	緑色点灯
USBケーブル接続 (5V input)	本体、ケースに充電	赤色ゆっくり点滅
	本体、ケースが満充電	緑色点灯
充電ケースの充電容量の確認	1. USBケーブルを差し込む 2. 本体をケースにセットする	<ul style="list-style-type: none"> ・ バッテリーが30%未満の場合、赤色に毎秒100mSで5秒間点滅します。 ・ バッテリーが30%から50%の場合、オレンジ色に毎秒100mSで5秒間点滅します。 ・ バッテリーが50%から100%の場合、緑色に毎秒100mSで5秒間点滅します。


装着方法

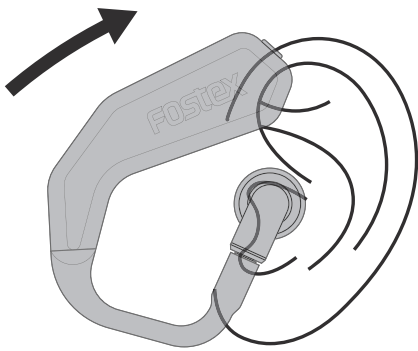

① 本体を耳の上にかけるようにしながら、イヤホンを耳孔に差し込む。

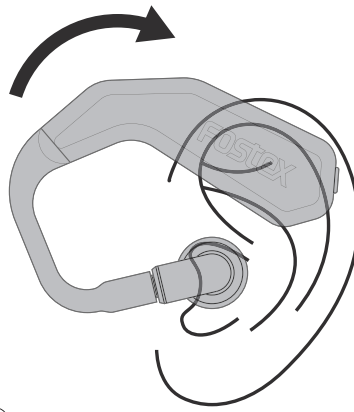

② 差し込んだイヤホンを軸に、耳の上部を挟み込むように後方へ回転させる。

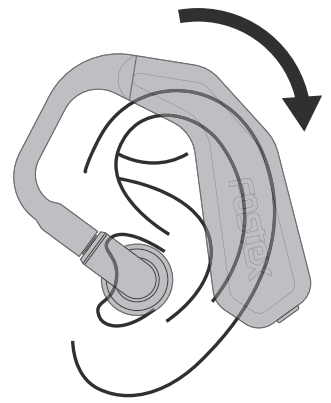

③ ケーブルが耳にあたるまで後方へ回転させ、ケーブルを耳周りの形状に合わせて変形させ固定する。


操作方法

マルチボタン操作



全体を3本の指でつかむように、親指でボタン操作する。


タッチセンサー操作

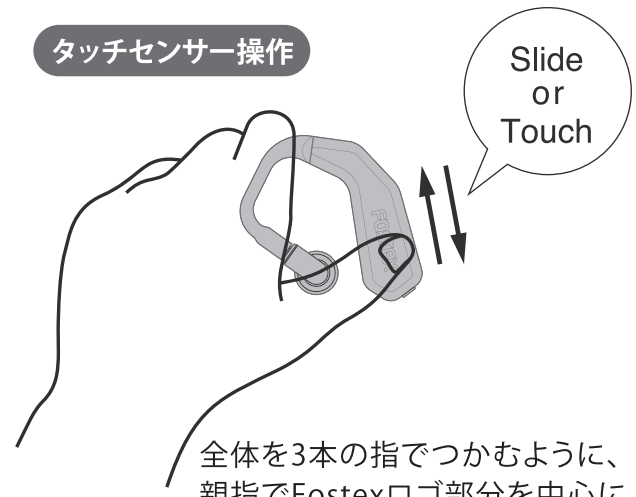

全体を3本の指でつかむように、親指でFostexロゴ部分を中心に、スライドまたはタッチ操作する。


ペアリング方法

レガシーモード接続

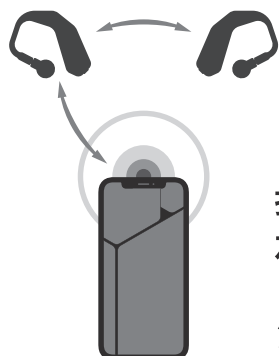

接続するBluetooth機器と、左右いずれかをマスターとして接続する従来のペアリング方法です。

True wireless Stereo Plusモード接続

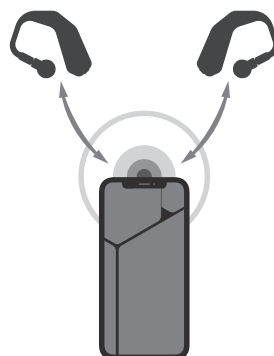

接続するBluetooth機器と、左右それぞれ個別に接続する新しいペアリング方法です。

- 両モードの判別方法は、接続時に自動的に行われますので、True Wireless Stereo Plusモード（以下TWS Plusモード）対応か否かは、接続するBluetooth機器の説明書をご確認ください。
- レガシーモードにおいて機能する、再接続ごとに電池残量の多い方を自動的にマスターとして切り替わるロールスワッピング機能を搭載。左右の電池残量を効率よく使用し、長時間駆動が可能となります。

ペアリング(接続)する

1. 接続するBluetooth機器（スマホ、DAP等）のBluetooth機器を有効にしてください。（接続するBluetooth機器の取扱説明書をご確認ください）
2. 本体を左右両方共充電ケースから取り出すと自動的に電源が入ります。
※手動の場合はマルチボタンを3秒間長押しで指を離す。

初回開封後（工場出荷状態時）に限り、左側を取り出すと自動的にペアリングモード（LEDランプが青色と赤色交互に点滅）になるように設定されています。

3. 左右いずれかを選択し、マルチボタンを約5秒間長押しすると、本体のLEDランプが青色と赤色で交互に点滅状態となり、ペアリングモードに入ります。
4. 接続するBluetooth機器のデバイス一覧に表示される「Fostex TM2 Left」または「Fostex TM2 Right」を選択してください。
5. ペアリングが完了すると、接続するBluetooth機器に「接続済み」と表示されます。
6. 同時に、もう一方の本体との連結処理が行われ、接続するBluetooth機器の画面に「Bluetoothペアリングの要求」がひよじされるので、「ペアリングする」または「ペア設定する」を選択し、左右間の連結が実行され、ペアリング作業が完了します。

各機能と操作方法、音声ガイダンス、LED表示について

①基本操作

機能／ステイタス	操作(左右同仕様)※	音声／ビープ	LED表示
電源を入れる(1)	充電ケースから本体を取り出す	「Power ON」	青色3回フラッシュ
電源を入れる(2)	ボタンを3秒長押し (充電ケースにセットしていない場合)	「Power ON」	青色3回フラッシュ
電源を切る(1)	充電ケースに本体をセットする	「Power OFF」	赤色3回フラッシュ
電源を切る(2)	ボタンを3秒長押し (充電ケースにセットしない場合)	「Power OFF」	赤色3回フラッシュ
ペアリング	「5秒間長押し」	「Pairing」	赤青交互高速点滅
ペアリング成功	—	「Pairing Successful」	青色3回フラッシュ
ペアリング失敗	—	3分経過↓ 「Pairing Failed → Power Off」	赤色3回フラッシュ
未ペアリング・アラート	—	「ボン、ボン、ボン」	—
左右未連結アラート	—	「ボン、ボン、ボン」	—
充電残少アラート	—	Low Battery (残約10分から警告開始)	(ガイダンスに併せて) 赤色4回フラッシュ
音量アップ	センサーエリアをタッチしながら 上にスライド	「ピ」	—
音量ダウン	センサーエリアをタッチしながら 下にスライド	「ピ」	—

②音楽再生操作

再生／一時停止	マルチボタン1回押し	「ピ」	—
曲送り(次の曲)	マルチボタン2回押し (音楽再生中)	「ピ」	—
頭出し(再生中の曲)	マルチボタン3回押し (曲開始3秒後)	「ピ」	—
曲戻し(前の曲)	マルチボタン3回押し (曲開始3秒以内)	「ピ」	—
早送り(コマ送り)開始	センサーエリアを 2秒以上タッチし続ける	「ピ」	—
早送り(コマ送り)停止～通常再生	センサーエリアから指を離す	「ピ」	—

③通話操作

着信	—	—	白色2回フラッシュ
受話(通話開始)	マルチボタン1回押し	「ピ」	—
切断	マルチボタン1回押し	「ピ」	—

④その他

初期設定(工場出荷状態に戻す)	マルチボタン長押し*13秒~15秒 (右の音が鳴ったら指を離す)	「ボン、ピン、ボン、ボン、ピ」	緑色2回フラッシュ
工場出荷状態に戻す(同期中)	—	—	青色高速点滅

初期設定(工場出荷状態に戻す)方法

1. はじめに、クレイドルからUSBケーブルを抜いてください。
2. 次に左右いずれかの本体を取り出し、マルチボタンを15秒長押しし指を離すと、LEDが青色で高速点滅します。続けてもう片方を15秒長押しして指を離すと、同じくLEDが青色で高速点滅します。
3. その状態(左右LED青色高速点滅)で、左右を約2cmくらいまで近づけると、両方のLEDが一旦消灯し、約2秒後に左側だけ、LEDが赤青交互に高速点滅状態になります。
4. その状態(右側:消灯・左側:赤青高速点滅状態)で、両方を充電ケースに戻すと、本体両方が消灯し、すべての情報がリセットされ、初期状態(工場出荷状態)となります。
5. その後、両方を充電ケースから取り出すと、左側のみLEDが赤青高速点滅し、自動的にペアリングモードとなります。



ペアリング操作時など、15秒以上長押ししないようご注意ください。

工場出荷状態に戻す方法を動画で確認できます。



Fostex TM2 Factory Reset

仕様詳細

- ▶ Bluetooth 仕様
 - ・ファームウェア ver. Bluetooth ver.5.0
 - ・出力クラス: Class2
 - ・通信方式: FSHH (周波数ホッピング方式)
 - ・通信距離: 約10m
 - ・周波数帯域: 2.4GHz帯 (2402 ~ 2480MHz)
 - ・対応プロファイル: A2DP1.3、AVRCP1.6、HSP1.2、HFP1.7
 - ・対応コーデック: AAC、apt-X、SBC
 - ・対応コンテンツ保護: SCMS-T方式
 - ・伝送帯域 (A2DP): 20Hz ~ 20kHz
- ▶ オーディオ仕様(イヤホン単体仕様)
 - ・型式: ダイナミック型
 - ・ドライバユニット: 口径6mm
 - ・再生周波数帯域: 10Hz ~ 40kHz
 - ・インピーダンス: 16Ω
 - ・外形寸法: W21.6 × D14.6 × H6.5 (mm)
- ▶ マイクロホン仕様
 - ・形式: MEMS
 - ・指向特性: 全指向性 / CVCノイズキャンセリング
- ▶ リモコン機能
 - ・音楽再生操作: 再生、一時停止、曲送り、曲戻し、頭出し、早送り、音量調整
 - ・通話操作: 受話、受話切り
- ▶ 充電ケース仕様
 - ・入力ポート: USB type-C
 - ・充電時間: 約1時間30分(満充電)
(本体を約3回満充電可能)
 - ・外形寸法: W138 × D67 × H35 (mm)
 - ・質量: 138g (本体含まず)
- ▶ その他
 - ・本体外形寸法: W40.2 × D48.2 × H8.8 (mm)
 - ・本体質量: 約11g × 2 (ケーブル、イヤホン含む)
 - ・電源(本体、ケース共通): DC3.7V 内蔵充電式リチウムイオン電池
 - ・本体充電時間: 約1時間30分(満充電)
 - ・連続再生 / 通話時間: 最大約10時間
(充電ケース併用で約40時間)
 - ・防水保護等級(本体): IPX5

Fostex TM Sound Support

Nov.2021
Ver.2.0.6

The **Fostex TM Sound Support** is an exclusive application to operate with the completely wireless earphone "TM2/TM2C". In order to enjoy the product under the better condition, please update to the most up-to-date firmware version. (The current newest version is 3.2.)



OPENING



If TM-series are not connected, the screen will not move forward and the application cannot be used.



When completing the TM-series connection, the screen will show the completion and automatically return to the Home screen.

HOME - Main Menu -


- **Status Icon**
The icon of the open page lights up. The page can be moved by touching the icon.



- **Connection Status**
The unit shape icons light up to indicate the connection status.
- **Battery Indicator**
The battery shape icons will show each of Left and Right unit to indicate the remained battery level with %.
- **Identify the Master Unit**
The master unit is indicated with triangle mark either ▶Left or Right◀
- **Firmware Version**
Tapping this area checks left and right firmware versions.
- **Main Contents**
- **Firmware Version**
To indicate the firmware of connected TM2 / TM2C.

<How to confirm the firmware versions of the connected TM2/TM2C>

*this function is available from the firmware version 3.2 onward.

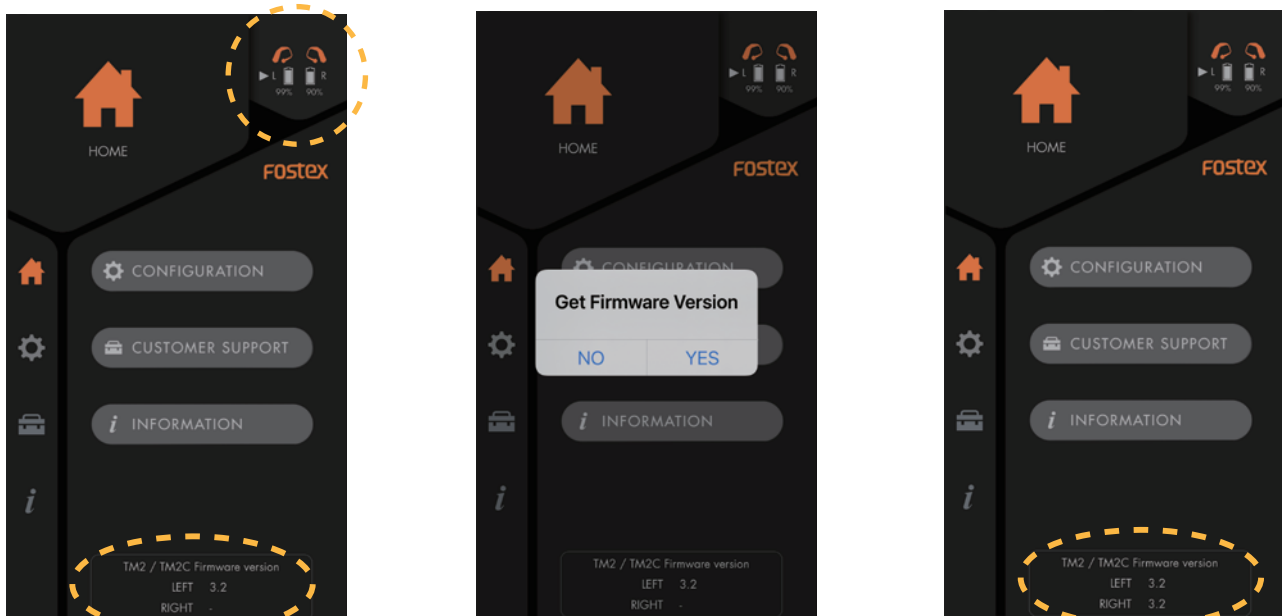


When HOME screen is rising up, the firmware version of parent unit is displayed. The child unit version is not yet displayed at this moment. Touching the TM2/TM2C icon on the top right hand corner makes the confirm button appeared. The version will be displayed by tapping "YES" if required.



If the previous update did not complete properly, you might be using the different versions on the left and right. In this case, proceed the update again using the one with old version as Master. Then the versions will become equal on both units.

CONFIGURATION

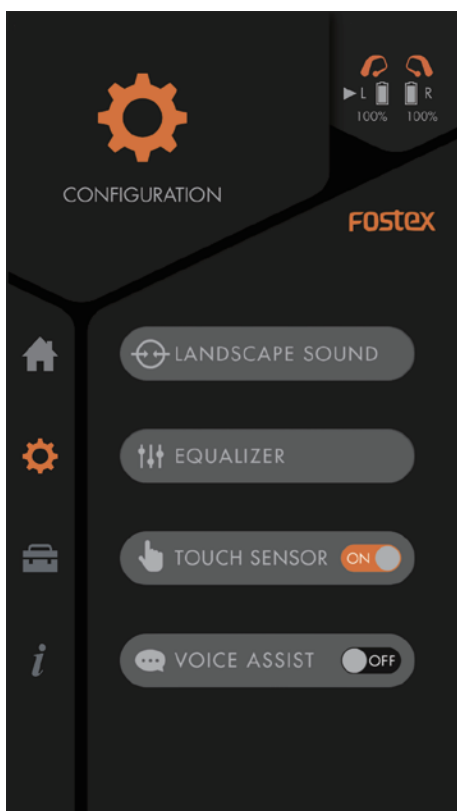

▶ LANDSCAPE SOUND

Adds the ability to capture external environmental sounds and mix them with the music being played.

▶ EQUALIZER

5 band equalizer to adjust the playback music audio characteristic.


▶ TOUCH SENSOR

Switching between ON enable or OFF disable of the touch sensor operation

▶ VOICE ASSIST

Switching between ON enable or OFF disable of AI assistant function which iPhone or other smartphone offers.

▶ LANDSCAPE SOUND

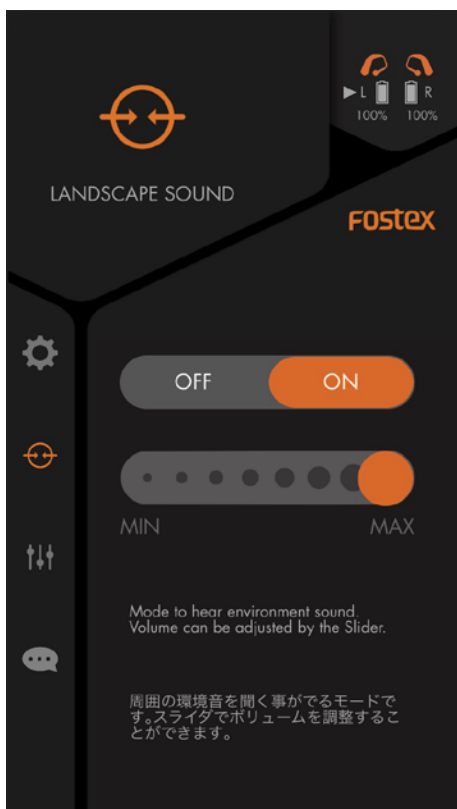

• ON / OFF Switch


Turning it ON will capture the external environmental sound. Voices such as train announcement can be heard easier even the earphones are on.

• VOLUME SLIDER


Turning it ON will enable the operation. The external environmental sound level can be adjusted.

▶ EQALIZER


The operation of 5 band equalizer, your own adjusted settings can be memorized up to 3 sets.

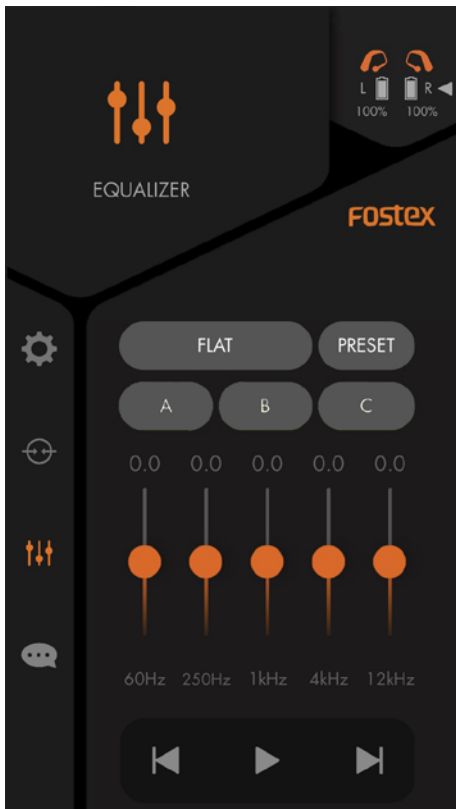


1 EQ standard setting (initial), the screen indicates flat and all buttons are grayed.

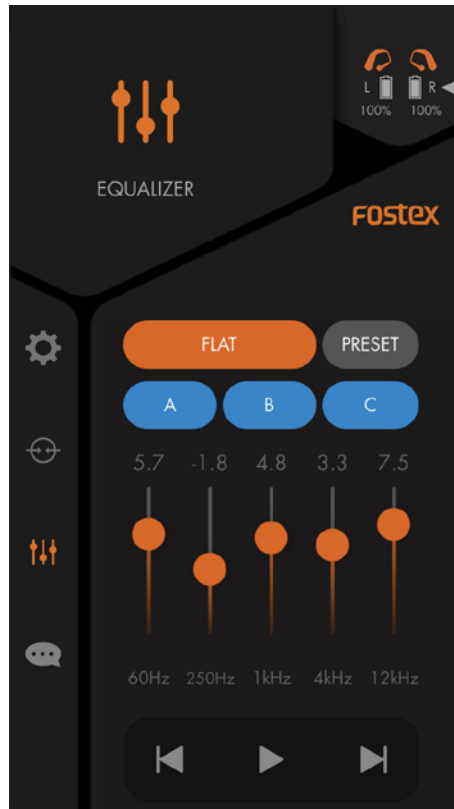

2 Adjusting EQ bars will make the FLAT button light up in orange and all ABC buttons light up in blue.

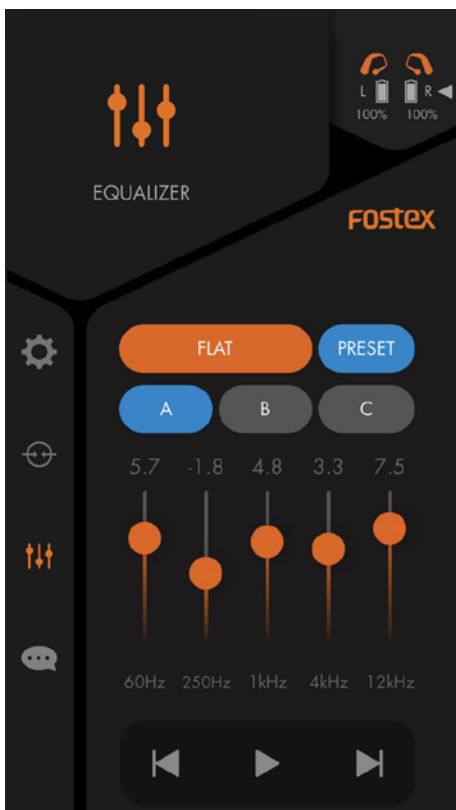



3 If you want the adjusted EQ bar setting to store as preset memory A, touching the A will light up the A and PRESET at the same time in blue.

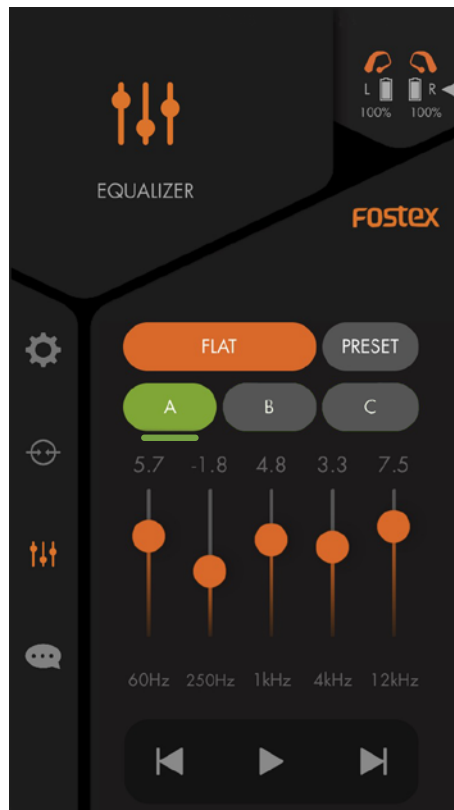

4 Touching the PRESET button will change its color to gray and the A button to green to finish the preset.


- PLAY BUTTON
Play/Stop/Fast Forward/Fast Reverse of the currently played back music

▶ TOUCH SENSOR

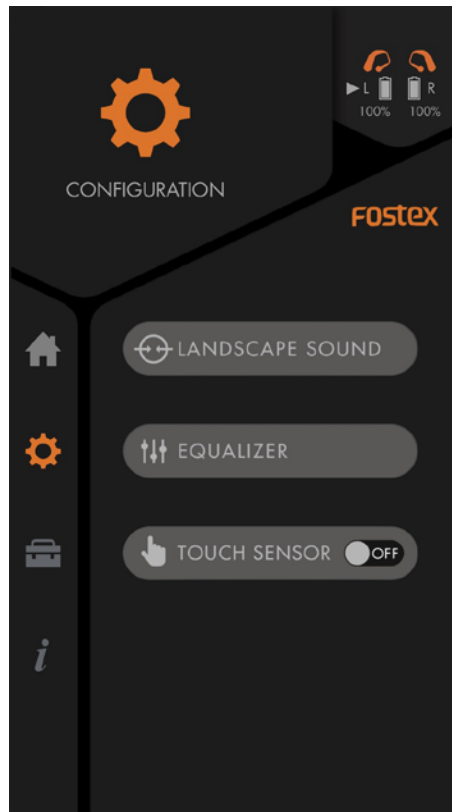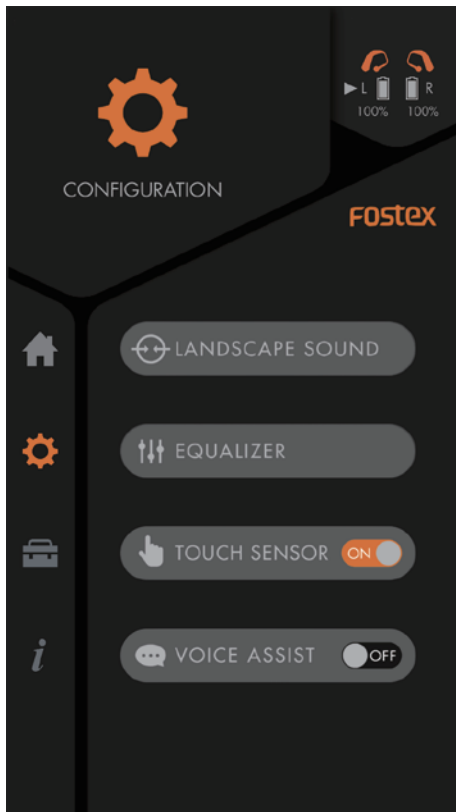


- TOUCH SENSOR / ON
Enabling the TOUCH SENSOR function to control the volume level, skip playback, and call up the AI assist operation.
- TOUCH SENSOR / OFF
Disabling the entire TOUCH SENSOR functions.
*VOICE ASSIST button will light off.

▶ VOICE ASSIST

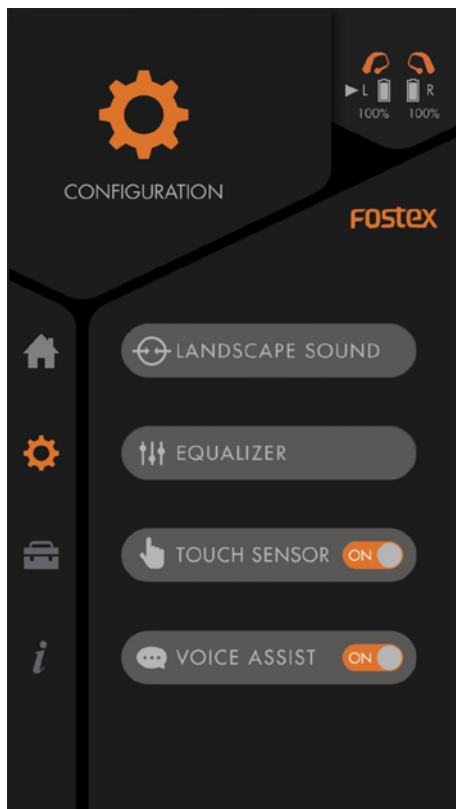

▶ IOS DEFAULT

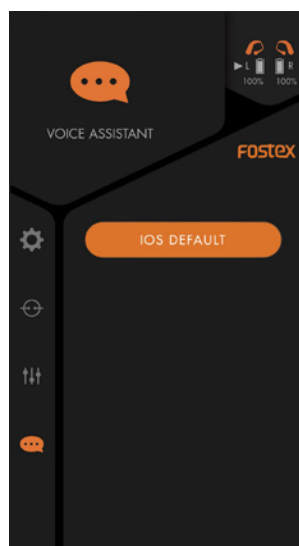

For iOS, it calls up the dedicated AI assistant.

▶ ANDROID DEFAULT




For Android, it calls up the dedicated AI assistant.

Touch Sensor Operation

The Touch Sensor can operate the following 3 functions.

- **Volume control**

During music playback, rub either Left or Right unit. Rubbing the touch sensor area (part of Fostex logo) upward will make the volume rising and downward will reduce the volume.

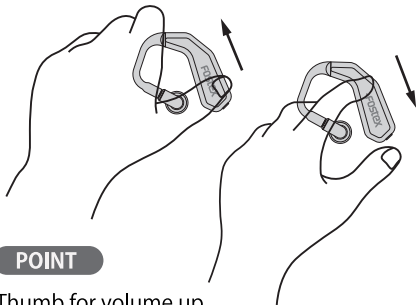


POINT

Thumb for volume up,
index finger for volume down!


- **Frame advance during playback**

During music playback, touching the touch sensor area (part of Fostex logo) of either Left or Right unit more than 2 seconds, the music will advance frame by frame. The frame advance operation will continue until you release your finger from the touch sensor area.

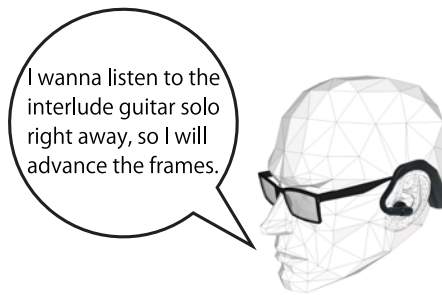

- **Calling up the AI assistant**

During silence by stopping the music playback or no sound being kept more than 5 seconds, touching the touch sensor area of Master unit more than 2 seconds will call up the AI assistant function of connected iPhone or smartphone via microphone installed in the TM2/TM2C.

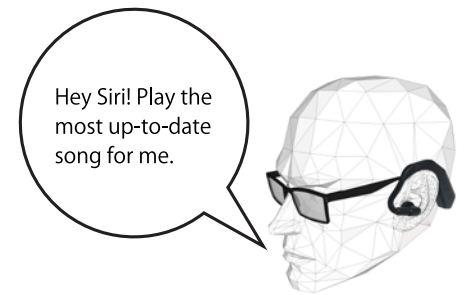


How to return to the factory default setting

Check the video !



Factory Reset Movie

CUSTOMER SUPPORT

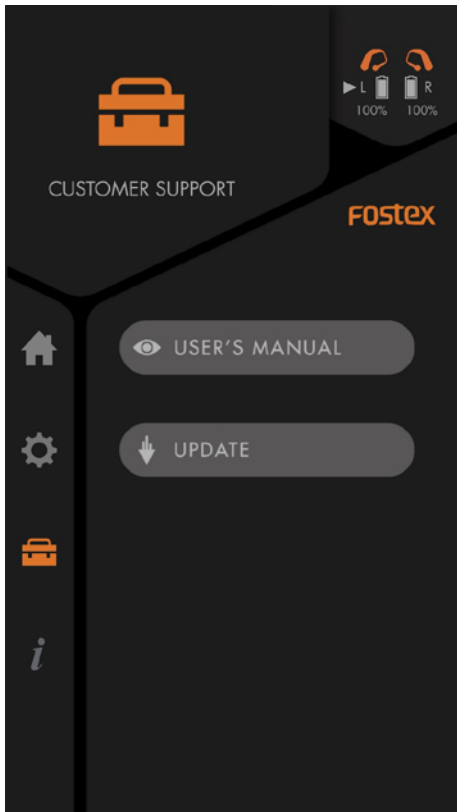

- **USER'S MANUAL**
To open the USER'S MANUAL
- **UPDATE**
To update the Firmware.



→ **USERS MANUAL**

UPDATE




HOW TO UPDATE

Firmware can be updated. The new update method can be found from the explanation page via QR code below.



How to Update Page


INFORMATION

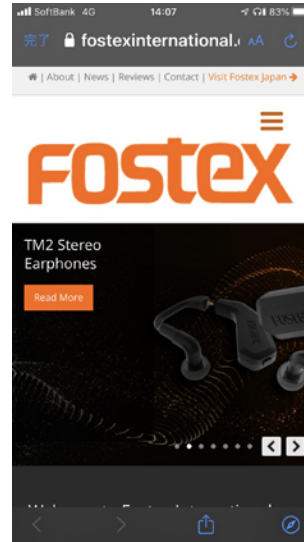

To access to the Fostex International home page link.

▶ **FOSTEX.COM**

▶ SYSTEM INFORMATION

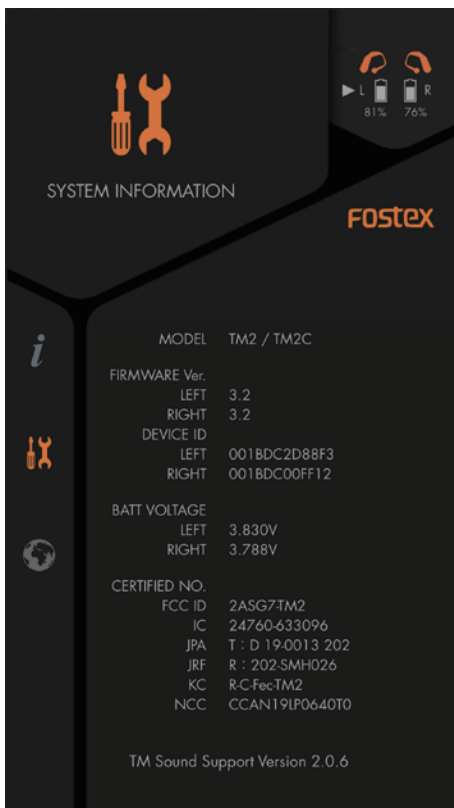

]**DEVICE ID**

To indicate the firmware of connected TM2 / TM2C.

]**DEVICE ID**

To indicate the ID of connected TM2 / TM2C.

]**BATT VOLTAGE**

To indicate the battery remained level of connected TM2 / TM2C.

]**CERTIFIED NO.**

To show the Radio Law certification number of each country.

はじめに

Fostex TM Sound Support は、完全ワイヤレス・イヤホン「TM シリーズ：Model.TM2/TM2C」で動作する専用アプリケーションです。より良い状態で製品を楽しんで頂くために、ご自身で最新のファームウェアへのバージョンアップを行いご使用ください。（最新ファームウェア・バージョンは 3.2 です）



OPENING



TM シリーズが接続されていない場合は、この画面より進むことができず、本アプリケーションをご使用できません。



TM シリーズが接続完了すると、本画面で接続完了をお知らせし、自動的に HOME 画面に移ります。

HOME - Main Menu -


- **Status Icon**
開いているページのアイコンが点灯します。また、アイコンをタッチすることでページの移動も可能です。



- **Connection Status**
形状アイコンが点灯し接続状態を示します。
- **Battery Indicator**
左右それぞれのバッテリー残量を電池型メモリと%表示します。
- **Identify the Master Unit**
マスター機には、▶左、右◀それぞれの三角印が表記されます。
- **Firmware Version**
このエリアをタップすることで、必要に応じて左右それぞれのファームウェア・バージョンを確認することができます。
- **Main Contents**
メイン・コンテンツ
- **Firmware Version**
接続された TM2 のファームウェア・バージョンを表記します。

<接続された TM2/TM2C のファームウェアバージョンの確認方法>

※ファームウェア・バージョン 3.2 からの機能となります。

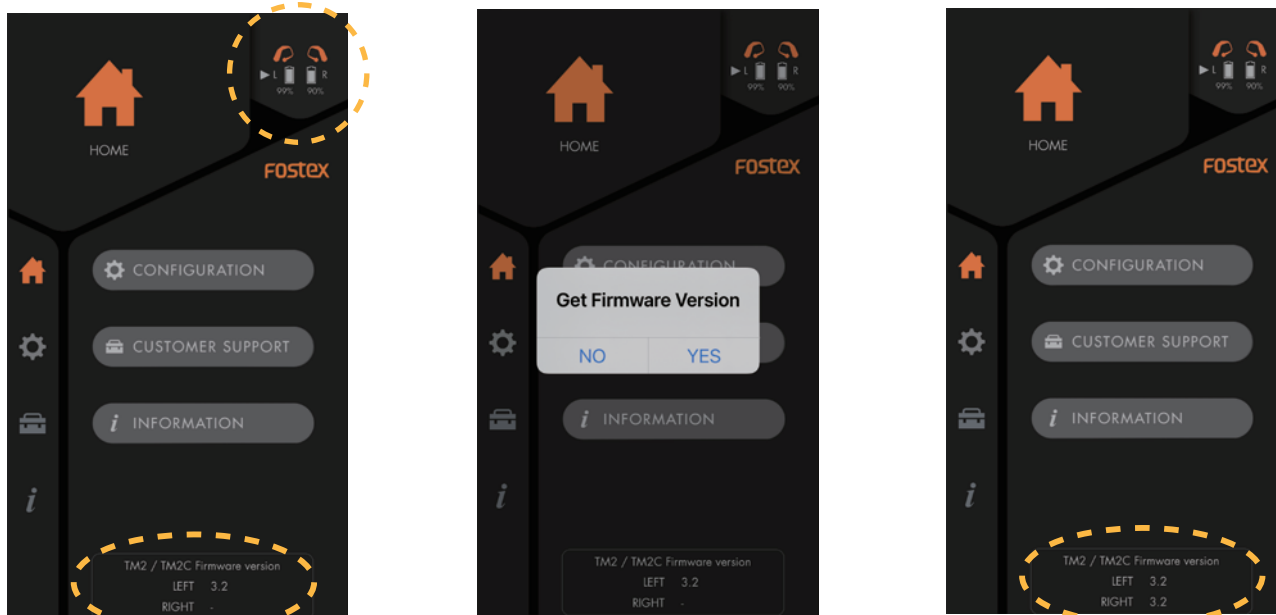


HOME 画面が立ち上がると、画面下部に接続された親機のファームウェア・バージョンが表記されます。その際、子機側のバージョンは未表記ですので、右上の TM2/TM2C アイコンをタッチすると、確認ボタンが表示されますので、確認が必要な場合は「YES」をタップして頂くことで表記することができます。



稀に、以前のアップデートが正しく完了しておらず、バージョンが左右で違うままご使用頂いていることがありますので、左右のバージョンが違う場合は、古いバージョンの方を親機として再度アップデート作業を行う事で、左右のバージョンを揃えることができます。

CONFIGURATION

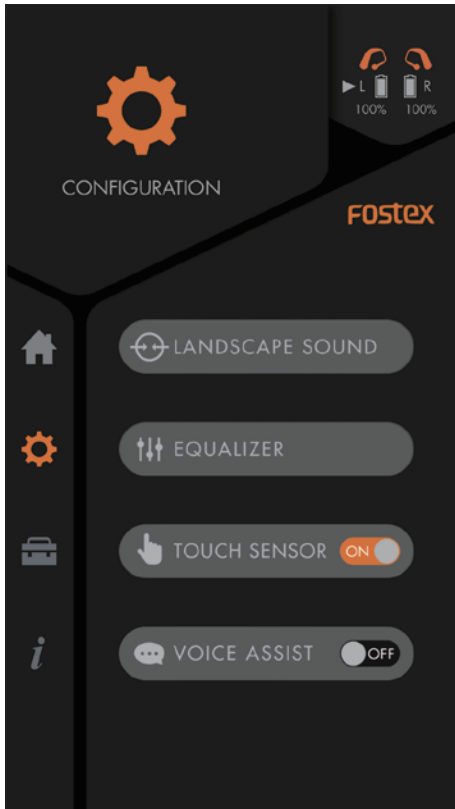

▶ LANDSCAPE SOUND

外部の環境音を取り込み、再生している音楽とミックスして聴くことができる機能を追加します。

▶ EQUALIZER

再生する音楽の音質を調整する5バンドイコライザー

▶ TOUCH SENSOR

タッチセンサー操作の ON 有効 / OFF 無効を切替えます。

▶ VOICE ASSIST

iPhone や各スマートフォンが個別有する AI アシスタント呼び出し機能を ON 有効 / OFF 無効で切替えます。

▶ LANDSCAPE SOUND (外部の環境音を取り込む機能です)



• ON / OFF Switch


ON にすると外部の環境音を取り込みことができます。イヤホンを掛けた状態でも、声や社内のアナウンス等が聞き取りやすくなります。

• VOLUME SLIDER


ON にした際に操作可能となります。外部の環境音の取り込み音量を調節することができます。

▶ EQALIZER (音声イコライジング～プリセット機能、プレイヤーボタン)


5 帯域の音質調整のイコライジング機能と、調整した設定値を 3 種類記憶させることができます。

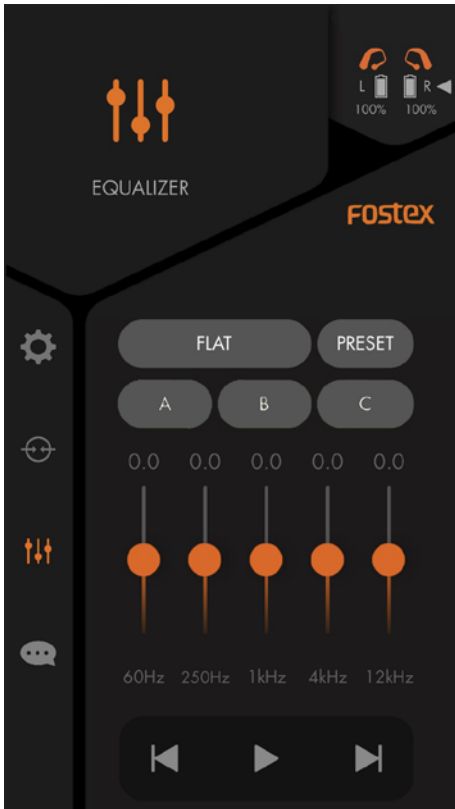


① EQ の標準 (初期) 画面の設定はフラットで、ボタンは全部グレー状態。

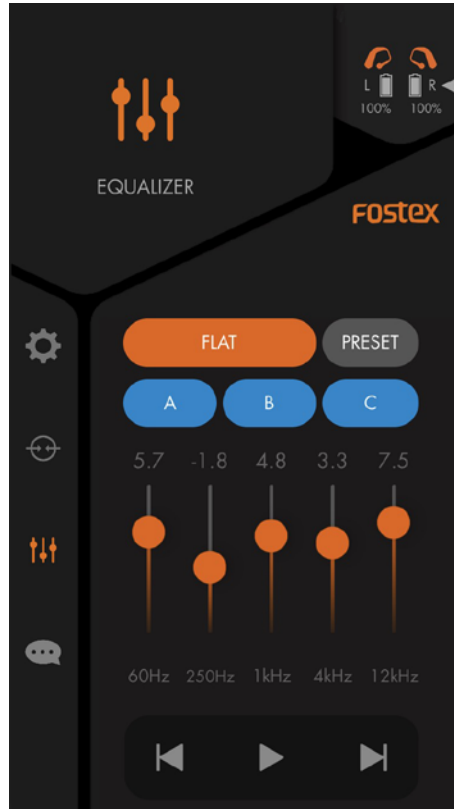

② EQ バー調整すると、FLAT ボタンはオレンジに点灯し、ABC ボタンは全てブルーに点灯。

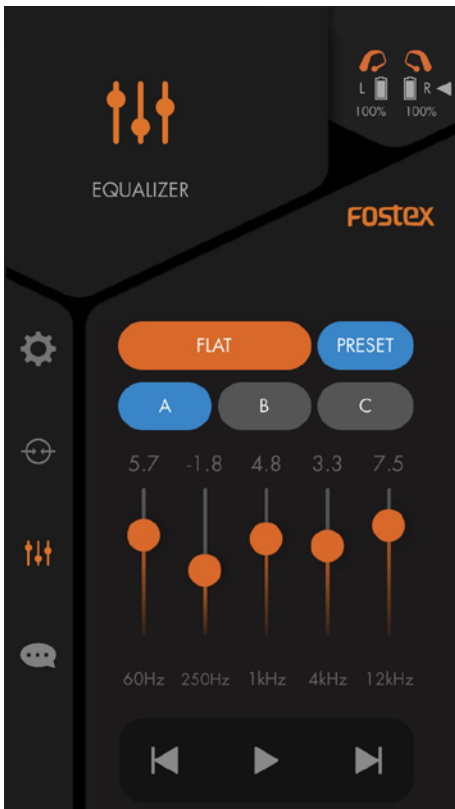



③ EQ バーで設定値を決め、これを A にプリセットしたい場合、A をタッチすると、A と同時に PRESET ボタンがブルーに点灯。

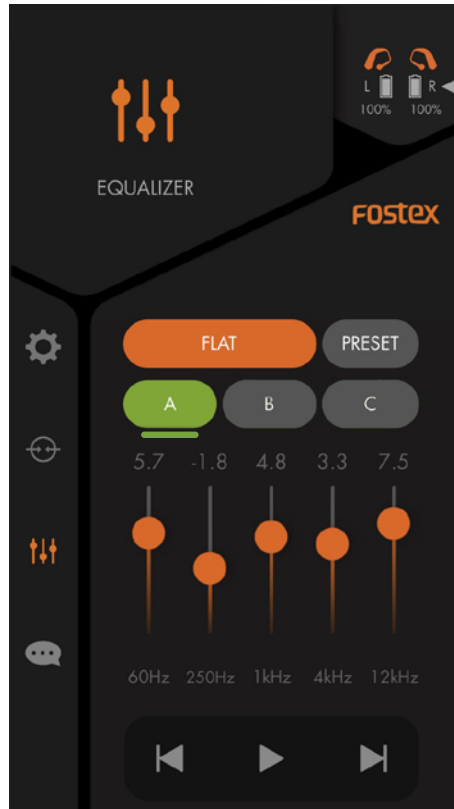

④ PRESET ボタンをタッチすると、PRESET ボタンはグレーに変更し、A ボタンはグリーンに変更しプリセットが完了。


• PLAY BUTTON
再生中の音楽の再生/
停止/曲送り/曲戻し
操作ができます。

▶ TOUCH SENSOR

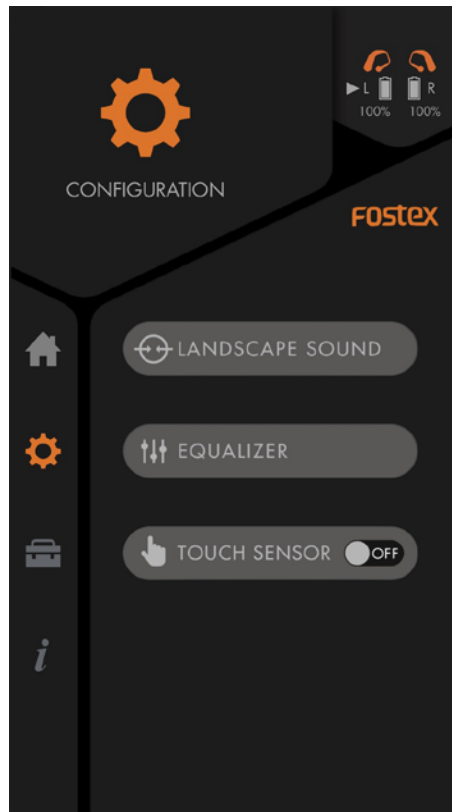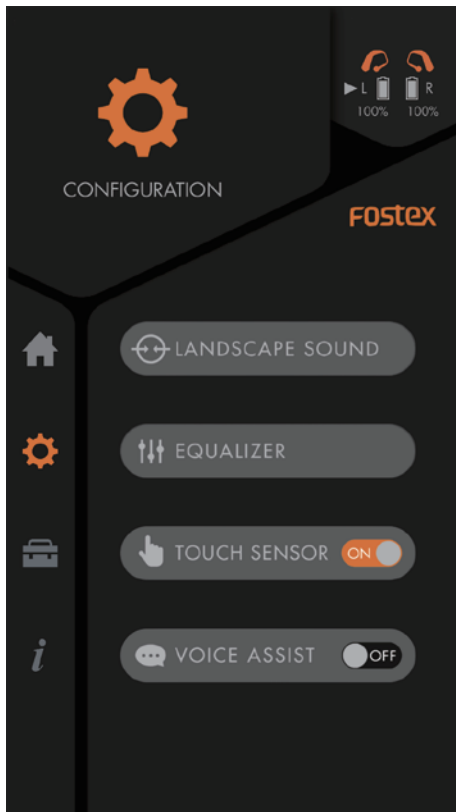


- TOUCH SENSOR / ON
タッチセンサー機能を有効にし、音量調整やスキップ再生、AIアシスタント呼び出し操作を行うことができます。
- TOUCH SENSOR / OFF
全てのタッチセンサー機能を無効にします。
※VOICE ASSIST ボタンが消えます。

▶ VOICE ASSIST

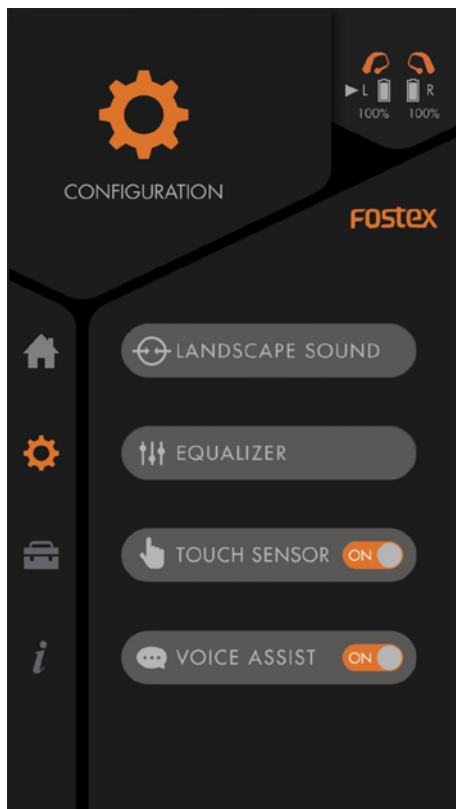

▶ IOS DEFAULT

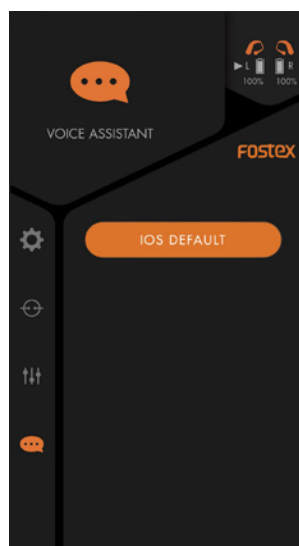

iOS の場合、専用 AI アシスタントを呼び出すことができます。

▶ ANDROID DEFAULT



Android の場合、専用 AI アシスタントを呼び出すことができます。

Touch Sensor Operation タッチセンサー操作方法

<タッチセンサーでは、以下の3つの操作をすることができます>

・音量調整

音楽を再生中に、左右どちらでもタッチセンサー・エリア（Fostexロゴ部分）を下から上になぞると音量が上がり、逆に上から下になぞると音量を下げるすることができます。



POINT

音量アップは親指で、
音量ダウンは人差し指で！


・再生中のコマ送り

音楽を再生中に、左右どちらでもタッチセンサー・エリア（Fostexロゴ部分）を2秒以上タッチし続けると、音楽がコマ送りされます。コマ送りは、タッチセンサー・エリアから指を離すまで続きます。※再生プレーヤー（サービス）によって、コマ送りの間隔は異なります。



・AIアシスタント呼び出し

音楽を停止し、または停止している状態が5秒以上経過している無音状態で、マスター機のタッチセンサー・エリアを2秒以上タッチし続けると、接続しているiPhone、またはスマートフォンのAIアシスタント機能を、TM2のマイクで呼び出すことができます。

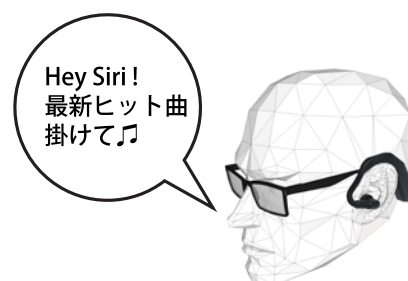


How to return to the factory default setting 工場出荷状態に戻す方法

Check the video!
動画で確認



Factory Reset Movie

CUSTOMER SUPPORT

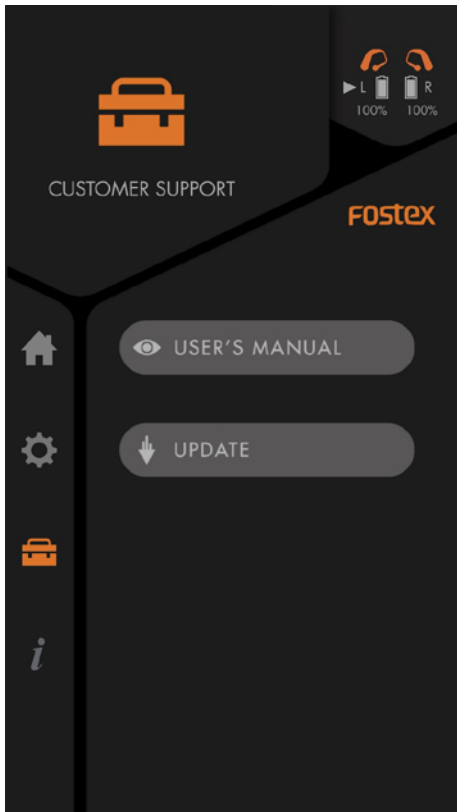

- **USER'S MANUAL**
取扱説明書ページが開きます。→
- **UPDATE**
ファームウェア・アップデート
することができます。



→ **USERS MANUAL**

UPDATE



HOW TO UPDATE

ファームウェア・アップデートすることができます。詳しいアップデート方法は、下記のQRコードから説明ページをご確認いただけます。




Firmware Ver.3.2

アプリケーション・バージョン2.0.6には、最新のバージョン3.2のファームウェアが含まれており、アップデートすることができます。



How to Update Page
アップデート手順（日本語）


INFORMATION

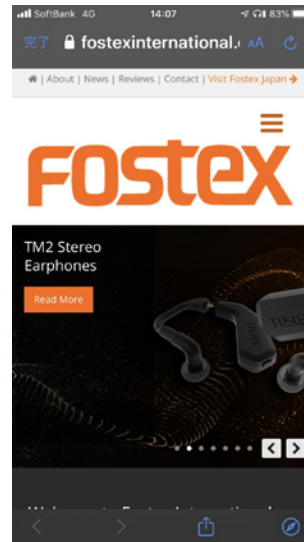

Fostex International ホームページへリンクします。

▶ **FOSTEX.COM**

SYSTEM INFORMATION

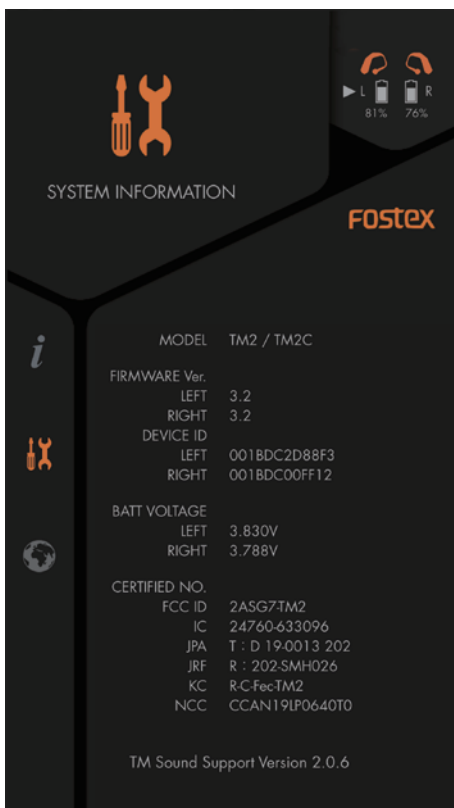

FIRMWARE Ver.

接続された TM2 / TM2C のファームウェア・バージョンが表記されます。

DEVICE ID

接続された TM2 / TM2C の ID が表記されます。

BATT VOLTAGE

接続された TM2 シリーズの使用バッテリー残量が表記されます。

CERTIFIED NO.

電波法認証取得した各国の認証番号を表記しています。

Fostex

TM2C

True Wireless Stereo Earphones

Safety information

Read this manual before use.

This manual describes Warning and Caution for safe use of Fostex products.

Keep the manual in a convenient place for future reference.



Warning; ignoring the warning may cause death or severe injury as a result of incorrect usage.



Caution; ignoring the caution may cause moderate injury or property damage as a result of incorrect usage.

Warning

- Listening to audio at excessive volumes may cause permanent hearing damage. Avoid prolonged usage and use at as low volume as possible.
- Do not use when driving vehicles such as automobiles, motorcycles or bicycles. Doing so is a traffic offence and may cause traffic accidents.
- Do not use in places where not hearing the surrounding sound is dangerous, such as railway crossings, train platforms, near heavy traffic and construction sites.
- Keep this product out of reach of small children. Handling by children may cause death or severe injury. This product includes parts that may cause a risk of choking or suffocation.
- Do not modify this product. Doing so may cause personal injury or product failure.

Caution

- Do not give physical shock to this product. Using a damaged product may cause personal injury.
- Do not get this product wet (except waterproof models). It may cause failure. Be careful when using outdoors, such as in rainy or snowy conditions, or at the beach.
- In case of product failure, ask your original retailer or Fostex for servicing.
- Avoid leaving this product in a closed car or under direct sunlight. High temperatures may result in failure.
- Before connecting to other audio products, read the instruction manual of the audio product. Turn off the power and set the volume of the other product to minimum when connecting this product.
- Sound leaks from the earphones if playback volume is too high. Be careful not to cause problems for the people around you.
- When disconnecting from other audio products, do not pull the cord too forcefully. Pulling the cord forcefully may result in wire damage or product malfunction.
- Stop use immediately if you do not feel well while using this product.
- Stop using as soon as possible if the earpiece does not agree with your skin.
- Firmly attach the earpiece. If just the earpiece remains in your ear, it may cause injury or illness.
- Remove and insert the earphones into your ears carefully and slowly. Carelessly removing or inserting the earphones may damage your ears.
- After use, wipe off sweat, sebum, hair styling aid and foundation, etc. on the product with a dry cloth.
- If you replace the earphone part with another manufacturer's product, we do not guarantee the connection and function with every earphone. Please note that we are not responsible for the outcome. Please try at your own risk. Thank you.

Caution about MMCX Connector

The MMCX type connector used in this product does not guarantee compatibility with all MMCX type earphones. In addition, the "TE series earphones" we released in the past are not compatible and cannot be used. Thank you for your understanding.

Caution

- Do not give physical shock to this product. Using a damaged product may cause personal injury.
- Do not get this product wet (except waterproof models). It may cause failure. Be careful when using outdoors, such as in rainy or snowy conditions, or at the beach.
- In case of product failure, ask your original retailer or Fostex for servicing.
- Avoid leaving this product in a closed car or under direct sunlight. High temperatures may result in failure.
- Before connecting to other audio products, read the instruction manual of the audio product. Turn off the power and set the volume of the other product to minimum when connecting this product.
- Sound leaks from the earphones if playback volume is too high. Be careful not to cause problems for the people around you.
- When disconnecting from other audio products, do not pull the cord too forcefully. Pulling the cord forcefully may result in wire damage or product malfunction.
- Stop use immediately if you do not feel well while using this product.
- Stop using as soon as possible if the earpiece does not agree with your skin.
- Firmly attach the earpiece. If just the earpiece remains in your ear, it may cause injury or illness.
- Remove and insert the earphones into your ears carefully and slowly. Carelessly removing or inserting the earphones may damage your ears.
- After use, wipe off sweat, sebum, hair styling aid and foundation, etc. on the product with a dry cloth.
- If you replace the earphone part with another manufacturer's product, we do not guarantee the connection and function with every earphone. Please note that we are not responsible for the outcome. Please try at your own risk. Thank you.

Caution about MMCX Connector

The MMCX type connector used in this product does not guarantee compatibility with all MMCX type earphones. In addition, the "TE series earphones" we released in the past are not compatible and cannot be used. Thank you for your understanding.

Caution

- Do not charge using any other method than that is specified in the instruction manual.
- Do not charge for more than 2 hours. It may cause deterioration of the battery otherwise.
- If the lithium-ion battery expands, immediately stop using it or charging it.
- If the rechargeable battery leaks, do not touch the product with the bare hands. If your body gets wet, rinse immediately with clean water and consult a doctor if you have any symptoms of injury.
- The leaked electrolyte may ignite and cause it to explode. If the battery fluid gets into your eyes or gets on your body or clothes, it may cause blindness or injury.
- Do not put it in a fire or heat it.
- Do not use, store or leave it in a hot place such as in the direct sunlight or in a car under the scorching sun.
- Do not give a strong physical impact or throw it.
- It is extremely dangerous to replace the battery by yourself. Please do not do it.

FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC Statement:

This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Taiwan regulatory information(NCC)

低功率電波輻射性電機管理辦法



第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

  FCC ID : 2ASG7-TM2
IC : 24760-633096

 T D19-0013 202
 R 202-SMH026

 CCAN19LP0641T2

Declaration of EC Directive

This equipment is compatible with the EMC Directive (2004/108/EC) - Directive on approximation of member nation's ordinance concerning the electromagnetic compatibility and with the Low Voltage Directive (73/23/EEC) - Directive on approximation of member nation's ordinance concerning electric equipment designed to be used within the specified voltage range.

The Affect of Immunity on This Equipment

The affect of the European Specification EN61000-6-1 (coexistence of electromagnetic waves - common immunity specification) on this equipment are as shown below.

In the electrical fast transient/burst requirements, surge, conducted disturbances by radio-frequency fields, power frequency magnetic field, radiate electromagnetic field requirements and static electricity discharging environment, this could be affected by generation of noise in some cases.

FOSTEX DISTRIBUTORS LIST IN EUROPE * including non-EU countries (as of Jan. 2020)

Austria

NAME: Mega Audio GmbH
ADD: Stromberger Str. 32, 55411 Bingen, Germany
TEL: (+49) 6721-94330, FAX: (+49) 6721-32046
Email: info@megaaudio.de
Web Site: <http://www.megaaudio.de>

Belgium

NAME: XLR sprl/bvba
ADD: Pierre Strauwenstraat 24, 1020 Brussels, Belgium
TEL: (+32) 2 520 0827, FAX: (+32) 2 521 1977
Email: info@xlrpro.be
Web Site: <http://www.xlrpro.be>

Czecho

NAME: Praha Music Center spol.s.r.o.
ADD: Ocelarska 937/39, Praha 9, 190 00, Czecho
TEL: (+420) 226-011-111, FAX: (+420) 226-011-112
Email: info@pmc.cz
Web Site: <http://www.pmc.cz>

Denmark

NAME: SC Sound A/S
ADD: Dalgas Alle 15, DK-6600 Vejen, Denmark
TEL: (+45) 4399 8877, FAX: (+45) 4399 8077
Email: mail@sc-sound.dk
Web Site: <http://www.sc-sound.dk>

France

NAME: Mega Audio GmbH (Pro Audio Only)
ADD: Feldborn 3, in 55444 Waldlaubersheim, Germany
TEL: (+49) 6707-914522, FAX: (+49) 6707-91452-88
Email: info@megaaudio.de
Web Site: <http://www.megaaudio.de>

France

NAME: TLHP / Son Lumiere Concept (Speaker Component Only)
ADD: 10 rue du Passavent, Zone du Val d'Orson, 35770 Vern sur Seiche
Tel: +33(0)892707657
Email: info@toutehautparleur.com
Website: <http://www.toutehautparleur.com/marque-tlhp.html>

France

NAME: Hamy Sound (Headphones and USB DAC Only)
ADD: 28 Rue Edith Cavell, 92400 Courvevoie, France
TEL: (+33) 1 4788 4702, FAX: (+33) 1 4789 4872
Email: sav@hamysound.com
Web Site: <http://www.hamysound.com>

Germany

NAME: Mega Audio GmbH
ADD: Feldborn 3, in 55444 Waldlaubersheim, Germany
TEL: (+49)6707 914 522, FAX: (+49) 6707 91452-88
Email: info@megaaudio.de
Web Site: <http://www.megaaudio.de>

Greece

NAME: Bon Studio S.A
ADD: 6 Zaimi Street, Exarchia, 106.83 Athens, Greece
TEL: (+30) 210-3809-605, 606, 607, 608
FAX: (+30) 210-3845-755, 210-3827-868
Email: bon@bonstudio.gr
Web Site: <http://www.bonstudio.gr>

Hungary

NAME: Mega Audio GmbH
ADD: Stromberger Str. 32, 55411 Bingen, Germany
TEL: (+49) 6721-94330, FAX: (+49) 6721-32046
Email: info@megaaudio.de
Web Site: <http://www.megaaudio.de>

Italy

NAME: Backline S.u.r.l.
ADD: Via dell' Aprica, 16 - 20158 Milano, Italy
TEL: (+39) 02 6901 5709, FAX: (+39) 02 6901 5645
Email: info@backline.it
Web Site: <http://www.backline.it>

Italy

NAME: Art of Music sas (Hi-Fi system & Speaker Components)
ADD: Via Dal Lino 23/2, 40134 Bologna, Italy
TEL: (+39) 347 2532215
Email: artofmusic@libero.it
Web Site: <http://www.balloacoustics.it>

The Netherlands

NAME: Mafico BV
ADD: Weg en Bos 2 2661 DH Bergschenhoek Nederland
Tel: +31 (0)10 - 414 8426 Fax: +31 (0)10 - 404 8863
Email: info@mafico.com
Website: www.mafico.com

Norway

NAME: Siv. Ing. Benum AS
ADD: P. O. Box 145, Vinderen, 0319 Oslo, Norway
TEL: (+47) 2213 9900, FAX: (+47) 2214 8259
Email: post@benum.no
Web Site: <http://www.benum.no>

Poland

NAME: MIP sp. z o.o.
ADD: Dziahdowska 12, Warsawa, Poland
Tel: (+48) 22 424 8254 Fax: (+48) 22 855 93 80
Email: biuro@mip.biz.pl
Website: <http://www.mip.biz.pl>

Russia

NAME: BLADE Group of Companies
ADD: 1st Krasnoselskiy lane, 7/9A, bld. 11, 3rd floor Moscow Russia 107140
Tel: +7(499) 705-1552 Fax: +7 495 276 2076
Email: info@blade.ru
Website: <http://www.blade.ru/>

Russia

NAME: Audio Mania LLC (Speaker Component Only)
ADD: 107023 Barabanniy Lane 4/4, Moscow Russia
Tel: +7 495 2680468
Email: info@audiomania.ru
Website: <http://www.audiomania.ru>

Spain & Portugal

NAME: ATCONSUMER (Consumer, Hi-Fi system & Speaker Components)
ADD: PO BOX 15, 08340 Vilassar de Mar, Barcelona, Spain
TEL: (+34) 609 288310
Email: info@atconsumer.es
Web Site: <http://www.atconsumer.es>

Sweden

NAME: Benum Nordic AS
ADD: Aldermansvagen 17, 171 48 Solna, Sweden
TEL: (+46) 8 207710
Email: sweden@benum.com
Web Site: <http://www.benum.se>

Sweden, Norway, Finland & Denmark

NAME: Supersonic Svenska AB (Speaker Components Only)
ADD: PO BOX 42043, 126 12 Stockholm, Sweden
TEL: (+46) 8 744 4700
Email: johan@supersonic.se

Switzerland

NAME: Audio Bauer Pro AG
ADD: Bernerstrasse-Nord 182, CH-8064 Zurich, Switzerland
TEL: (+41) 44 432 3230, FAX: (+41) 44 432 6558
Email: info@audio-bauerpro.ch
Web Site: <http://www.audio-bauerpro.ch>

Turkey

NAME: Extreme Audio
ADD: Sheraton Istanbul Maslak Kat B2 Buykdere Cad.
Nr:233 Ucyol Mevkii 34398 Maslak Istanbul Turkey
Tel: +90 444 3760
Fax: +90 212 285 0073
Email: bahadir@extreme-audio.com
Website: <http://www.extreme-audio.com>

UK

NAME: SCV London
ADD: Unit C1 Belcon Industrial Estate, Geddings Road,
Hodesdon, Hertfordshire, EN11 0NT, UK
TEL: (+44) 03 301 222500, FAX: (+44) 20-8418-0624
Email: fostex@scvlondon.co.uk
Web Site: <http://www.scvlondon.co.uk>

Ukraine

NAME: A & T Trade Petrosop
ADD: 29, Obolonskaya Str., Kiev, Ukraine 04071
TEL: (+380) 44-462-5358, FAX: (+380) 44-462-5092
Email: attrade@attrade.kiev.ua
Web Site: <http://kiev.attrade.ru>

Ukraine

NAME: Era in Ear
ADD: 1 Maryanenko Lane Kharkiv, Ukraine
Tel: +38 044 221 1980
Email: sale@era-in-ear.com
Website: <http://era-in-ear.com>

Fostex TM2C

完全ワイヤレス・ステレオイヤホン

安全上のご注意

ご使用の前に、必ず本項をよくお読みいただき、本機を正しくご使用ください。本項は、お買い上げいただいたフォステクス製品を安全にご使用いただくために必要な「警告事項」、「注意事項」について、まとめて記載してあります。あなたや他の人々へ与える危害や、財産などへの損害を未然に防止するために、本項に記載されている事項をお守りいただくものですので、いつでもお読みいただける場所に大切に保管して下さい。



警告記号は、この警告表示内容を守らずに誤った使用方法をした場合、死亡または重傷を負う危険性が予想される内容です。



注意記号は、この注意表示内容を守らずに誤った使用方法をした場合、傷害を負う危険性や物的な損害を招く危険性が予想される

製品使用上のご注意

- ※本書の内容に関しましては万全を期しておりますが、万一ご不審な点、記載漏れ等がございましたら、販売店または当社までご連絡ください。
- ※この取扱説明書で説明された以外の使い方によって生じた損害に関して、弊社は一切責任を負いません。
- ※本書の内容については予告なく変更する場合があります。
- ※当社は製品の故障に関して一定の条件で修理を保証致しますが、火災、地震、第三者による行為、その他事故、お客様の故意または過失、誤用、その他異常な条件下での使用による損害に関して弊社は一切責任を負いません。
- ※本製品は、医療機器、原子力機器、航空宇宙機器、輸送用機器など人命に関わる設備や機器、および高度な信頼性を必要とする設備、機器での使用は意図されておりません。これらの設備、機器制御システムに本製品を使用し、本製品の故障により人身事故、火災事故などが発生した場合、当社は一切責任を負いません。
- ※本製品は日本国内仕様であり、日本国外での使用に関し、当社は一切責任を負いません。
- ※本製品のデザイン及び仕様は製品改良のため予告なく変更する場合があります、購入された製品とは一部異なる場合があります。

Bluetooth についてのご注意

- ・本製品の使用周波数帯は2.4GHz帯です。変調方法としてFHSS(周波数拡散方式)を採用しており、想定される与干渉距離は約10mです。この周波数帯では電子レンジ等の産業、科学、医療用機器等の他、工場の生産ライン等で使用されている移動体識別用の構内無線局(免許を要する無線局)及び、特定小電力無線局(免許を要しない無線局)並びにアマチュア無線局(免許を要する無線局)が運用されています。
- ・本製品を使用する前に、近くで移動体識別用の無線局及び特定小電力無線局、アマチュア無線等が運用されていない事を確認してください。(電波干渉が発生した場合は速やかに利用場所を変更するか、ご使用を停止してください)
- ・その他、同周波数帯を使用する無線機器(電子レンジ、コードレス電話機、無線LAN機器)の近くで本製品を使用すると、電波の干渉が発生する恐れがあります。

2.4FH1

MMCX コネクタに関してのご注意

本製品に採用しておりますMMCXタイプのコネクタは、すべてのMMCXタイプのイヤホンとの互換性を保証するものではありません。また、弊社製旧モデルのMMCXタイプコネクタを採用した「TEシリーズ」すべてにおいて、互換性がありませんのでご使用いただけません。予めご了承頂きますようお願いいたします。



- ・大きな音量で使用すると、耳を痛めるなど、慢性的な聴力障害の原因となる恐れがあります。長時間の使用を控え、できるだけ小さな音量で使用して下さい。
- ・自動車やオートバイ、自転車の運転中は、絶対に使用しないでください。交通違反であり、交通事故の原因となります。
- ・踏切や駅のホーム、交通の激しい道、工事現場など、周囲の音が聞こえいと危険な場所では使用しないでください。
- ・本機は小さいお子様の手の届かない場所に保管して下さい。お子様が扱うと、死亡や重傷の原因となる恐れがあります。本機は喉につまったり、窒息する危険性のある部品がふくまれます。
- ・本機の改造は絶対にしないでください。怪我や製品故障の原因となります。



- ・本機に衝撃を加えないようご注意ください。破損した状態で使用すると障害を負う恐れがあります。
- ・本機を直接水がかかる場所で使用しないで下さい。故障の原因になります。特に屋外での使用(雨天、降雪時、海岸、水辺)にはご注意ください。
- ・万一本機が故障した場合は、販売店または当社まで修理を依頼して下さい。そのまま使用すると、障害を負う恐れがあります。
- ・本機を、窓を閉め切った自動車の中や直射日光が当たるところなど、異常に温度の高いところには置かないで下さい。故障の原因となります。
- ・音量を上げすぎると音が外に漏れます。音量を上げすぎて、まわりの人に迷惑にならないようにしましょう。
- ・本機を使用中に気分が悪くなった時は、すぐに本機の使用を中止してください。
- ・イヤークラスが肌に合わないと感じた時は、早めに使用を中止してください。
- ・イヤークラスはしっかりと取り付けて下さい。イヤークラスが外れて耳に残ると、怪我や病気の原因となる事があります。
- ・耳への脱着はゆっくりと丁寧に行って下さい。乱暴に脱着を行うと、耳を傷つける事があります。
- ・ご使用後、製品に付着した汗、皮脂、整髪用品、ファンデーション等を乾いた布で拭いてください。
- ・イヤホン部分を他社製品に付け替えて使用する場合、すべてのイヤホンの接続を保証するものではありません。弊社では責任負いかねますので、ご了承のうえ自己責任にてお試ください。
- ・ペースメーカーやその他の医療機器を使用している方は、医師または該当の医療機器メーカーに相談の上でご使用ください。
- ・航空機内や病院など、使用を禁止された場所では使用しないでください。
- ・本製品は電波法に基づく小電力データ通信の無線設備として認証を受けています。従って、本製品を使用するときに無線局の免許は必要ありません。但し、本製品を分解/改造や、本製品に貼ってある証明ラベルをはがす等の行為を行う事は、法律により罰せられる事があります。

内蔵充電式電池についてのご注意

本製品は、充電式電池(リチウムイオン電池)を内蔵しております。液漏れや破裂、発熱、発火、誤飲等などによる重傷(失明、大やけど、重度のけが)、障害(やけど、感電、軽度のけが)など人体への影響、また、家屋や財産等の物的障害を避けるため、以下の注意事項を必ずお読みください。

⚠ 注意

- ・ 本書で指定している以外の方法で充電しないでください。
- ・ 長時間(2時間以上)充電をしないでください。劣化の原因となります。
- ・ 万一、リチウムイオン電池が膨張してきたら直ちに充電、またはご使用中を中止してください。
- ・ 充電式電池の液が漏れたときは、素手で本製品には触らないでください。万一、身体に液がついた場合、すぐにきれいな水で洗い流し、けがの症状がある場合は医師に相談してください。
- ・ 漏液した電解液に引火し、破裂、発火の原因になります。また電池の液が目に入ったり体や衣服に付着したりすると、失明やけがの原因になります。
- ・ 火の中に入れたり、加熱したりしないでください。
- ・ 直射日光のあたるところ、炎天下の車中など、高温の場所での使用や保管、放置しないでください。
- ・ 強い衝撃を与えたり、投げつけたりしないでください。
- ・ お客様個人での充電電池の交換は、大変危険ですので、絶対にしないでください。

本製品の廃棄方法



本機の電源として使用されている内蔵リチウムイオン電池はリサイクルできます。この充電式電池の取り外しはお客様自身では行わず、フォステクス・カスタマーサービス、または販売代理店にお問い合わせください。

アフターサービスについて

- この説明書裏には、保証書が印刷されています。お買い上げの際に、販売店で所定の事項を記入してお渡します。記載内容をお確かめの上、大切に保管してください。
- 保証期間は、お買い上げ日から1年です。期間中は保証書の規定に基づいて、当社サービス部門が修理いたします。詳細については、「無償修理規定」をお読みください。
- 保証期間を過ぎてしまった場合、または保証書を紛失した場合の修理については、お買い上げの販売店、または当社営業窓口 / サービス部門へご相談ください。
- 保証期間を過ぎてしまった場合でも、修理によって製品の機能が維持できる場合には、お客様のご要望により、有料修理いたします。
- この製品の補修用性能部品(製品の機能を維持するために必要な部品)の最低保有期間は、製造打ち切り後6年です。
- 当社サービス部門の連絡先は、以下のようになっています。お気軽にご相談ください。

国内営業窓口

☎ 042-545-6111 ㊟ 042-546-6067

土日・祝日および当社指定休日を除く
AM 10:00~12:00, PM 1:00~5:00

カスタマー・サービス

☎ 0428-28-3450 ㊟ 0428-28-3455

土日・祝日および当社指定休日を除く
AM 10:00~12:00, PM 1:00~5:00

無償修理規定

1. 取扱説明書の注意書きに従った正常な使用状態で、保証期間内に故障が発生した場合には、弊社サービス部門が無料修理いたします。
2. 保証期間内に故障して無料修理を受ける場合は、
 - (1)製品と保証書をご持参の上、本製品の取扱代理店、または弊社サービス部門へ修理をご依頼ください。
 - (2)離島および離島に準ずる遠隔地への出張修理を行った場合は、出張に要する実費を申し受けます。
3. ご贈答品などで所定事項の記入がない場合、電源周波数の異なる地域へのご転居の場合には、弊社サービス部門へご相談ください。
4. つぎの場合には、保証期間内でも有料修理となります。
 - (1)ご使用上の誤り、および不当な修理や改造による故障および損傷。

- (2)お買い上げ後の輸送・移動・落下などによる故障および損傷。
 - (3)火災・地震・水害・落雷その他の天災地変、公害や異常電圧による故障および損傷。
 - (4)接続している他の機器に起因する故障および損傷。
 - (5)異常磨耗、異常損傷を除き、自然消耗と見なされた消耗部品による故障および損傷。
 - (6)特殊業務、または特に苛酷な条件下において使用された場合の故障および損傷。
 - (7)電源周波数の変更、およびメンテナンス。
 - (8)保証書のご提示がない場合。
 - (9)保証書にお買い上げ年月日、お客様名、お取り扱い店(印)の記入がない場合、あるいは字句を書き換えられた場合。
 - (10)中古品(未開封・未使用品含む)の購入や知人からの譲渡など所有権を第三者から譲り受けた場合。
 - (11)並行輸入など弊社正規ルート以外によって販売された製品。
5. 保証書は、日本国内のみにおいて有効です。This guarantee is valid only in Japan.
6. 保証書は再発行いたしません。紛失しないよう大切に保管してください。

※ この保証書は、本書に明示した期間・条件において、無料修理をお約束するものです。したがって、この保証書によってお客様の法律上の権利を制限するものではありませんので、保証期間経過後の修理等ご不明な場合は、本製品のお取り扱い店、または弊社サービス部門へお問い合わせください。

※ 保証期間経過後の修理、補修用性能部品の保有期間については、前述の「アフターサービスについて」をご覧ください。

7. 保証規定が適用外となる事象

以下に記載の事象は保証規定が適用されません。

- (1)盗品など犯罪に関わることが判明した製品。
- (2)法令に違反する使用が判明した製品。
- (3)弊社もしくは弊社認定の修理技術者以外の第三者により改造された製品、もしくは不適切に修理された製品。
- (4)工場出荷時のシリアル番号が改変、削除された製品、もしくは故意に読み取れないようにされた製品。
- (5)製品の輸送に使用する事を目的としている梱包箱・テープ・シールなどの外装品の破損や汚れ。